




GW Instek rolls out 40A AC ground bond tester - GCT-9040 to augment the existing safety tester product line and to replace the legacy model GCT-630. GCT-9040 provides the maximum AC test current of 40A and adopts the PWM design the same as other models to ensure test efficiency and reliability. Furthermore, large LCD display, 100 memory blocks from setting criteria, and programmable communications interface together deliver users with higher readability and convenience.

In addition to the standalone ground bond test operation, GCT-9040, with 40A AC ground bond test capability, can also externally connect with GW Instek safety testers such as GPT-9800/9900/9900A series to augment users' product test requirements by the all-in-one test platform. For instance, GPT-9802 (AC/DC withstanding tester), via external connection, can be expanded to a safety tester system with three testing functionalities.

Additionally, after the safety tester system has been assembled, not only the sequential test function for the original all-in-one models can be executed, but also the simultaneous output test can be conducted. The simultaneous output test allows two testers to simultaneously test DUT so as to shorten the overall test time. Whether the safety tester system executes sequential test or simultaneous output test, GCT-9040 will automatically obtain control over two testers, including activation control, final status indication light, and pin signal output from Digital I/O etc. to avoid confusion caused by each tester's indication light.

Last but not least, GCT-9040, with respect to remote control and data retrieval, not only provides standard USB (optional GPIB) interface to control all functionalities but also controls connected safety testers (GPT-9800/9900/9900A series) via commands to read measurement results.

### SIMULTANEOUS TEST (SCHEMATIC DIAGRAM FOR CONNECTION)

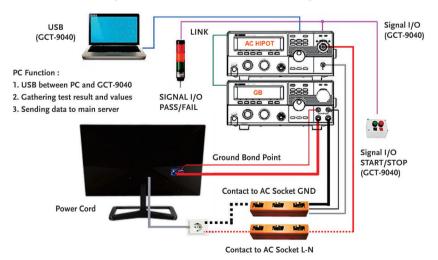





#### **FEATURES**

- AC 40A Ground Bond Tester
- Measuring Resistance from  $1m\Omega \sim 650m\Omega$
- Connect with the GPT-9800/9900 Series to Become a Sequential Test or Simultaneous Test System
- 240x64 Ice Blue Dot Matrix LCD
- · Function Key for Quick Selecting
- High Intensity Flash for Caution & Status Indication
- PWM Switching Amplifier to Enhance the Power Efficiency and Reliable Testing
- Max. 100 Memory Block for Test Condition Setting
- Remote Terminal on the Front Panel for "Start" and "Stop" Remote Active
- Interface: USB Device, Signal I/O and GPIB (optional)



Front



Rear Panel

# **APPLICATIONS**

- Safety Testing of Ground Bond of Electrical Product in Manufacturing
- Quality Assurance Verification
- Safety Standard Compliance Pre-qualification in R&D

ПE

 Performing a Sequential or Simultaneous Test After Connect with GPT-9800/9900 Series



$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$			
Output-Current Resolution Output-Current Accuracy   3.0.01A   3.4 ≤ 1 ≤ 8.4 : ± (1% of setting + 0.2A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   8.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9.4 < 1 ≤ 40A : ± (1% of setting + 0.05A)   9	SPECIFICATIONS		
INTERFACE  LINK USB Standard Option Remote Terminal (Front) Signal I/O Display  POWER SOURCE & COMSUMPTION  Comsumption  For system connection Standard Option Standard Standard Standard 240 x 64 Ice Blue Dot matrix LCD  AC 100 V / 120 V / 220 V / 230 V ±10%, 50/60Hz Max. 700VA	GROUND BOND	Output-Current Resolution Output-Current Accuracy  Test-Voltage Test-Voltage Frequency Resistance Measurement Range Resistance Measurement Resolution Resistance Measurement Accuracy Window Comparator Method TIMER (Test Time) GND	0.01A $3A \le l \le 8A$ : $\pm (1\% \text{ of setting} + 0.2A)$ $8A < l \le 40A$ : $\pm (1\% \text{ of setting} + 0.05A)$ $8Vac max (open circuit)$ $50Hz/60Hz$ selectable $1.0m\Omega \sim 650.0m\Omega$ $0.1m\Omega$ $\pm (1\% \text{ of reading} + 2m\Omega)$ Yes $0.5s \sim 999.9s$ OFF (fix)
USB GPIB Remote Terminal (Front) Signal I/O Display  POWER SOURCE & COMSUMPTION  Standard Standard Standard Standard 240 x 64 Ice Blue Dot matrix LCD  AC 100 V / 120 V / 220 V / 230 V ±10%, 50/60Hz Max. 700VA	MEMORY	Single Step Memory	MANU : 100 blocks
COMSUMPTION Comsumption Max. 700VA	INTERFACE	USB GPIB Remote Terminal (Front) Signal I/O	Standard Option Standard Standard
<b>DIMENSIONS &amp; WEIGHT</b> 330(W) x 148(H) x 460(D) mm; Approx. 17kg max.			
	DIMENSIONS & WEIGHT	330(W) x 148(H) x 460(D) mm; Approx. 17kg max.	

Specifications subject to change without notice. CT-9040GD1DH

#### **ORDERING INFORMATION**

GCT-9040 40A AC Ground Bond Tester

#### **ACCESSORIES**

Quick Start Guide x 1, Power cord x 1, Test lead GTL-215 x 1, LINK cable GTL-132 x 1, USB cable GTL-247 x 1, Remote terminal male plug x 1, Interlock key x 1, CD x1 (complete user manual)

## OPTIONAL

Opt.1 GPIB card

### **OPTIONAL ASSESSORIES**

GTL-248 GPIB Cable, approx. 2m
GTL-251 GPIB-USB-HS (High Speed)
GRA-417 RACK Adapter Panel (19", 4U)

Global Headquarters

#### GOOD WILL INSTRUMENT CO., LTD.

No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan T +886-2-2268-0389 F +886-2-2268-0639 E-mail: marketing@goodwill.com.tw

China Subsidiary

## GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.

No. 521, Zhujiang Road, Snd, Suzhou Jiangsu 215011 China T +86-512-6661-7177 F +86-512-6661-7277 E-mail: marketing@instek.com.cn

Malaysia Subsidiary

# GOOD WILL INSTRUMENT (M) SDN. BHD.

27, Persiaran Mahsuri 1/1, Sunway Tunas, 11900 Bayan Lepas, Penang, Malaysia T+604-6309988 F+604-630988 E-mail: sales@goodwill.com.my

Europe Subsidiary

### GOOD WILL INSTRUMENT EURO B.V.

De Run 5427A, 5504DG Veldhoven, THE NETHERLANDS T +31 (0)40-2557790  $\mathbf{F}$  +31 (0)40-2541194

U.S.A. Subsidiary

## INSTEK AMERICA CORP.

5198 Brooks Street Montclair, CA 91763, U.S.A. T+1-909-399-3535 F+1-909-399-0819 E-mail: sales@instekamerica.com

Japan Subsidiary

### TEXIO TECHNOLOGY CORPORATION.

7F Towa Fudosan Shin Yokohama Bldg., 2-18-13 Shin Yokohama, Kohoku-ku, Yokohama, Kanagawa, 222-0033 Japan
T+81-45-620-2305 F+81-45-534-7181

E-mail: info@texio.co.jp

Korea Subsidiary

#### GOOD WILL INSTRUMENT KOREA CO., LTD.

#1406, Ace Hightech-City B/D 1Dong, Mullae-Dong 3Ga 55-20, Yeongduengpo-Gu, Seoul, Korea T+82-2-3439-2205 F+82-2-3439-2207 E-mail: gwinstek@gwinstek.co.kr



Zone Acticentre -Bâtiment H - 156/220 Rue des Famards - CRT2 - CS 10210 - 59173 FRETIN Tél. 03 20 62 06 80 Télécopie : 03 20 96 95 62 E-mail : <u>contact@dimelco.com</u>





ununu muinetek sen

ununu facabaak cam/CV/Inctak