



Zone Acticentre - Bâtiment H - 156/220  
Rue des Famards - CRT2 - CS 10210 - 59273 FRETIN  
Tél. 03 20 62 06 80 Télécopie : 03 20 96 95 62  
E-mail : [contact@dimelco.com](mailto:contact@dimelco.com)



# MSO-2000 Series

**VPO**  
Visual Persistence Oscilloscope

200/100/70MHz Mixed-signal Oscilloscope

## FEATURES

- 200/100/70MHz Bandwidth Selections : 2 or 4 Channels
- Real Time Sample Rate Per Channel : 1GSa/s (2 Channel Models);  
Maximum Real Time Sample Rate : 1 GSa/s (4 Channel Models)
- MSO-2000E Equips with a 16 Channel Logic Analyzer
- MSO-2000EA Equips with a 16 Channel Logic Analyzer and a Dual Channel  
25MHz Arbitrary Waveform Generator
- Maximum 10M Memory Depth and VPO Waveform Display Technology
- Waveform Update Rate up to 120,000 wfms/s
- 8" WVGA TFT LCD
- Maximum 1M FFT Provides Higher Frequency Domain Resolution Measurements
- High Pass, Low Pass and Band Pass Filter Functions
- 29,000 Segmented Memory Sections and Waveform Search Function
- I<sup>2</sup>C/SPI/UART/CAN/LIN Serial Bus Trigger and Decoding Functions
- Data Log Function is Able to Track Signal Changes up to 100 Hours
- Mask Test Function
- Network Storage Function

**GW INSTEK**  
Simply Reliable

# Economical and Multi-Functional MSO

The MSO-2000 series is a mixed-signal oscilloscope, which offers dual analog channels + 16 digital channels or 4 analog channels + 16 digital channels. The MSO-2000 series includes MSO-2000E and MSO-2000EA. MSO-2000E has a built-in 16-channel logic analyzer and MSO-2000EA has a built-in 16-channel logic analyzer and a dual channel 25MHz arbitrary waveform generator. The entire series features bandwidth selections of 200MHz, 100MHz, and 70MHz. Dual analog channel models provide 1GSa/s real-time sampling rate per channel; four analog channel models provide 1GSa/s maximum real-time sampling rate. The 8-inch 800\*480 TFT LCD and the minimum 1mV/div vertical range allow the MSO-2000 series to measure complex feeble signals and clearly display measurement results.


For analog channels, the MSO-2000 series provides 10M long memory for users to completely retrieve and analyze waveforms. Users, based upon the application requirements, can select 1k, 10k, 100k, 1M or 10M memory depth. Short memory depth collocating with the high sampling rate allows users to observe fast-changing waveforms and, on the other hand, long memory depth aims for continuously changing waveforms. The MSO-2000 series is equipped with waveform search and segmented memory functions to expand the flexible applications of 10M long memory. The segmented memory can be divided the maximum into 29,000 sections for users to bypass any unimportant waveforms so as to swiftly search all required waveforms. With the segmented memory function, more meaningful waveforms can be saved and target waveforms can be displayed rapidly. Users, by using the waveform search function, can rapidly search desired waveforms according to the required trigger conditions.

16-channel logic analyzer has a memory depth of 10Mpts per channel, which can retrieve more and longer digital signals as well as clearly display digital signals to obtain sufficient information for analysis. The minimum input swing of logic analyzer represents the minimum operating voltage of  $\pm 250$  mV, which demonstrates that digital channels are highly sensitive with respect to input. The standard bus trigger and decoding functions include serial and parallel bus such as I2C, SPI, UART (RS232/422/485) and CAN/LIN bus for automotive communications. The parallel bus function is only for digital channels. Bus waveforms can be triggered and decoded in real time. The MSO-2000 series offers complete analysis and debugging capabilities with the economical pricing.

In addition to a 16-channel logic analyzer, MSO-2000EA has a built-in dual channel 25MHz arbitrary waveform generator with the modulation capability and also features 14 bits vertical resolution; sample rate of 200MSa/s; 5 standard output waveforms (Sine, Square, Pulse, Ramp, DC, Noise) and 7 user-defined waveforms (Sinc, Gaussian, Lorentz, Exponential Rise, Exponential Fall, Haversine, Cardiac); AM/FM/FSK modulation and sweep function. The user friendly interface is the ideal choice for applications such as circuit simulation and education tests.




CAN Bus Trigger and Decode

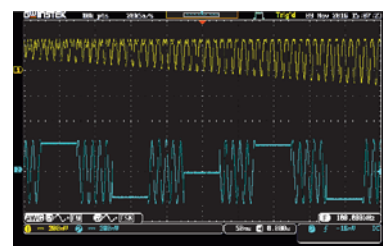

Dual Channel Arbitrary Waveform Generator


## A. 120,000wfms/s WAVEFORM UPDATE RATE AND VPO WAVEFORM DISPLAY TECHNOLOGY

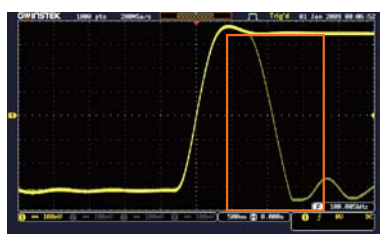

The MSO-2000 series oscilloscope allows users to easily and completely observe inrush signals and rare transient waveforms to increase waveform debugging efficiency by using features, including advanced VPO (Visual Persistence Oscilloscope) signal processing technology, waveform update rate as high as 120,000 wfms/s, and multi-layered afterglow display to enhance waveform display efficiency. Oscilloscope with VPO technology


displays signals with three dimensional waveforms constructed by amplitude, time and signal strength to show each waveform point. 256 color gradients yield clear waveform changes. Comparing with the conventional digital storage oscilloscope, the MSO-2000 series provides more natural and more genuine signal display effect which is very close to the original analog signal.

## B. DUAL DISPLAY SCREEN ZOOM-IN AND PLAY/PAUSE FUNCTIONS

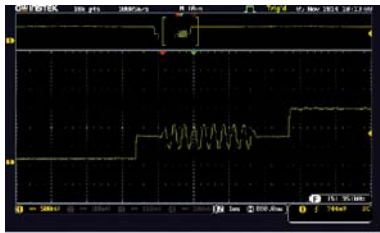


The MSO-2000 series provides the dual display screen zoom-in function to simultaneously display waveforms and major target areas. Users can zoom in display area by adjusting time/div. Under zoom-in mode, waveform can be played or paused so as to automatically view all input waveforms on the moving zoom-in screen. User can swiftly identify each desired event. Manual control play speed and direction can be adjusted according to users' requirements. Press "Pause" to stop the play function. With "waveform search", all desired events from different stages can be rapidly identified and examined back and forth. The MSO-2000 series is capable of swiftly searching signals and observing signals' details. 10M long memory depth provides the function of complete waveform retrieval and analysis.

## C. 1M FFT FREQUENCY DOMAIN DISPLAY FUNCTION

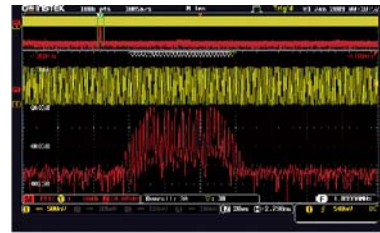


The FFT function of the MSO-2000 Series provides the maximum 1M display for more precision frequency domain display. The function supports four-window displays, including Rectangular, Hamming, Hanning, and Black-harris. Users select window display for frequency domain analysis according to test requirements. The MSO-2000 series not only provides the FFT function but also FFTrms, vertical adjustment, and local zoom-in functions for users to adjust waveforms of frequency domain by their requirements. Via rapid waveform update rate and waveform search functions, users can precisely observe the test results of frequency domain.

## D. 38 ITEMS OF AUTO MEASUREMENT SELECTION AND THE STATISTICS FUNCTION

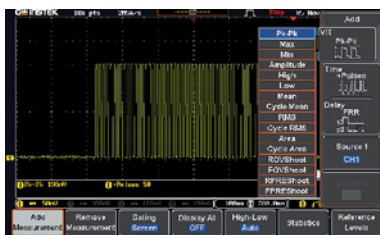

The MSO-2000 series soundly provides 38 measurement items. Based upon the parameters such as voltage, current, time, frequency, and delay measurement, users can decide which measurement items to choose. On the single display screen, the MSO-2000E series

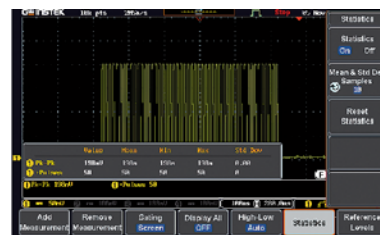

provides 8 measurement selections. The statistics mode can also be selected for users to analyze the mean value, the maximum, the minimum, and standard deviation of the retrieved waveforms to ensure signal's integrity and identify abnormal waveforms.


## E. SUPPORT I<sup>2</sup>C, SPI, UART, CAN, LIN BUS TRIGGER AND DECODING FUNCTION



Decode by Analog Channel



Decode by digital Channel

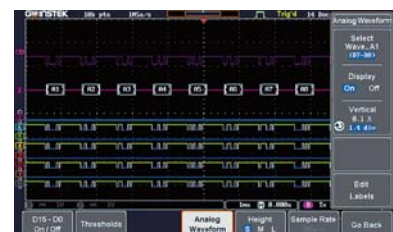


Display analog waveform converted from digital signal

The serial bus technology has been widely applied in the present embedded application design. To rapidly and correctly trigger and analyze serial bus data has posed a difficult challenge to engineers. The MSO-2000 series provides parallel and serial bus analysis function with 10M long memory depth. Users can select either analog or digital channels to trigger, decode, and analyze frequently used I<sup>2</sup>C, SPI and UART serial bus and CAN/LIN bus, which is often used by automotive communications. While using digital


channels, the analog waveform converted from digital channels can be observed so as to examine and analyze time-related analog and digital signals. The above-mentioned function can verify and analyze the conversion between analog and digital signals. Currently, many embedded designs are digital signals. The MSO series also provides digital channels for parallel bus analysis and decoding. The above standard serial and parallel bus functions are the best test platform for school courses and embedded circuit designs.

## F. WAVEFORM SEARCH FUNCTION

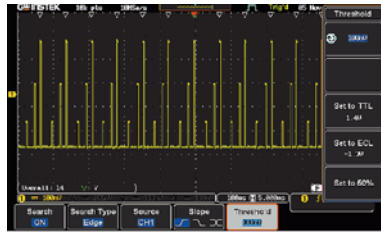


Users can rapidly search desired waveforms according to the trigger condition. After activating the search function, hollow inverted triangles will show the location met the trigger condition. The upper left hand corner Overall will show the total number of waveforms met the trigger condition. Users can set waveform search by the trigger condition such as Edge, pulse width, Runt, Rise/Fall, and Bus. When the trigger condition is met, hollow inverted triangles will appear. Users can save all marks to compare with the next input signal. The front panel of the MSO-2000 series controls waveform zoom-out and play/pause function to swiftly identify each desired event. The function allows users to conveniently complete waveform search and save marks for rapid comparison and analysis.

## H. DATA LOG FUNCTION

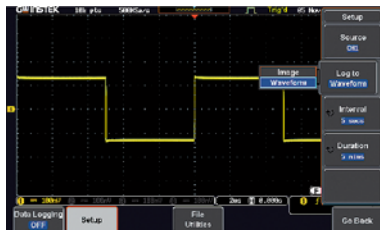


Users, via the data log function, can observe waveform changes in long periods of time to ensure product reliability or measure sporadically appeared signals. The data log function, based on the requirements, can set record time and interval. Record time can be selected from 5 minutes to 100 hours, and record interval is 5 seconds, the minimum. Waveform type for record data and CSV file format for each channel can also be selected. Data can be stored in USB drive, the MSO-2000 series or the remote computer via LAN.

## G. DIGITAL FILTER FUNCTION




Unfiltered Waveform with Noise Interference



Filtered Waveform, Noise Removed

Engineers are often troubled by noise interference while measuring signals in the electric circuit tests. The MSO-2000 series features the digital filter function which can be set to high pass or low pass digital filter. Digital filter allows users to independently set filter frequency for each channel. The tracking on function rapidly sets same filter frequency for all channels.


## I. SEGMENTED MEMORY FUNCTION




Users Can Also Select “Analyze Segments” to Conveniently Obtain The Analysis Results.

To achieve the most ideal application for memory depth, the MSO-2000 series has the built-in segmented memory function. The segmented memory function allows users to select the desired important signals for observation. Hence, insignificant signals can be neglected and serial bus decoding; pulse or inrush signals can be identified when retrieving signals. The segmented memory function of the MSO-2000 series allows users to select the number of sections. The maximum sections can be selected are 29,000. After activating the function, users can select and observe waveform for each segment by turning the Variable knob. The ultimate application of memory depth, therefore, is completely realized.

## J. MASK FUNCTION

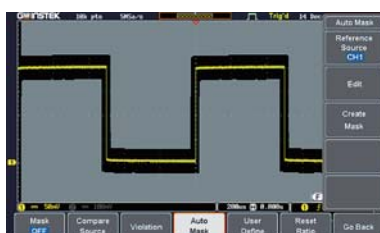

The MSO-2000 series provides the Mask function, which allows users to apply Auto Mask and user-defined Mask to determine whether the quality of the product meets the regulation. Via user-defined mask, users can set up to 8 areas and each area is up to

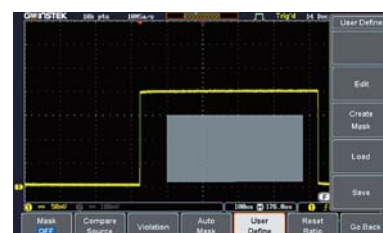

10 points to meet test requirements. Users can also refer to the examples from user manual to edit Mask by the PC to satisfy all test needs. By setting Save On, users can log and monitor signals, which violate test conditions.



## PANEL INTRODUCTION



1. Hardcopy Key
2. Autoset, Run/Stop, Single & Default Keys
3. Search and Zooming Controls
4. Trigger Controls
5. Math, Reference & Bus Keys
6. Probe Calibration Output
7. USB Host Port
8. Option Key
9. Menu Off Key
10. Logic Analyzer Probe Connector
11. USB Device Port
12. LAN Port
13. Go-NoGo Output
14. Calibration Output
15. Dual Channel Arbitrary Waveform Generator ( MSO-2000EA only )

### MSO-2000E Series SELECTION GUIDE

Model	MSO-2204E	MSO-2202E	MSO-2104E	MSO-2102E	MSO-2074E	MSO-2072E
Bandwidth	200MHz	200MHz	100MHz	100MHz	70MHz	70MHz
Channels	4	2	4	2	4	2
Record Length	10M / ch	10M / ch	10M / ch	10M / ch	10M / ch	10M / ch
Real-time Sampling Rate	Max. 1 GSa/s	Per channel 1 GSa/s	Max. 1 GSa/s	Per channel 1 GSa/s	Max. 1 GSa/s	Per channel 1 GSa/s
Built-in	16 Channel Logic Analyzer					

### MSO-2000EA Series SELECTION GUIDE

Model	MSO-2204EA	MSO-2202EA	MSO-2104EA	MSO-2102EA	MSO-2074EA	MSO-2072EA
Bandwidth	200MHz	200MHz	100MHz	100MHz	70MHz	70MHz
Channels	4	2	4	2	4	2
Record Length	10M / ch	10M / ch	10M / ch	10M / ch	10M / ch	10M / ch
Real-time Sampling Rate	Max. 1 GSa/s	Per channel 1 GSa/s	Max. 1 GSa/s	Per channel 1 GSa/s	Max. 1 GSa/s	Per channel 1 GSa/s
Built-in	16 Channel Logic Analyzer and Dual Channel 25MHz Arbitrary Waveform Generator					

## SPECIFICATIONS

		MSO-2072E(A)	MSO-2074E(A)	MSO-2102E(A)	MSO-2104E(A)	MSO-2202E(A)	MSO-2204E(A)
VERTICAL SENSITIVITY	Channels	2Ch+EXT	4Ch	2Ch+EXT	4Ch	2Ch+EXT	4Ch
	Bandwidth	DC–70MHz (-3dB)		DC–100MHz (-3dB)		DC–200MHz (-3dB)	
	Rise Time	5ns		3.5ns		1.75ns	
	Bandwidth Limit	20MHz		20MHz		20M/100MHz	
	Vertical Resolution	8 bits : 1mV ~ 10V/div					
	Input Coupling	AC, DC, GND					
	Input Impedance	1M $\Omega$ // 16pF approx.					
	DC Gain Accuracy	$\pm$ (3% when 2mV/div or greater is selected ; $\pm$ (5%) when 1mV/div is selected					
	Polarity	Normal & Invert					
	Maximum Input Voltage	300Vrms , CAT I (300Vrms CAT II with GTP-070B-4/100B-4/200B-4, 10 : 1 probe)					
	Offset Position Range	1mV/div ~ 20mV/div : $\pm$ 0.5V ; 50mV/div ~ 200mV/div : $\pm$ 5V ; 500mV/div ~ 2V/div : $\pm$ 25V ; 5V/div~10V/div : $\pm$ 250V					
	Waveform Signal Process	+ , - , $\times$ , $\div$ , FFT , FFTrms , Uesr Defined Expression FFT : 1Mpts ; FFT : Spectral magnitude. Set FFT Vertical Scale to Linear RMS or dBV RMS ; FFT Window Displays : Rectangular, Hamming , Hanning, Blackman-Harris					
TRIGGER	Source	CH1 ,CH2, CH3, CH4, Line, EXT* ; *dual channel models only.					
	Trigger Mode	Auto (Supports Roll Mode for 100 ms/div and slower), Normal, Single Sequence					
	Trigger Type	Edge, Pulse Width(Glitch), Video, Pulse Runt, Rise & Fall(Slope), Alternate, Time out, Event-Delay(1–65,535 events),Time-Delay(Duration;4ns–10s), Bus					
	Trigger Holdoff Range	4ns ~ 10s					
	Coupling	AC, DC, LF rej. , Hf rej. , Noise rej.					
	Sensitivity	1div					
EXT TRIGGER	Range	$\pm$ 15V					
	Sensitivity	DC ~ 100MHz Approx. 100mV; 100MHz ~ 200MHz Approx. 150mV					
	Input Impedance	1M $\Omega$ $\pm$ 3%, ~16pF					
HORIZONTAL	Time Base Range	1ns/div ~ 100s/div (1-2-5 increments); ROLL : 100ms/div ~ 100s/div					
	Pre-trigger	10 div maximum					
	Post-trigger	2,000,000 div maximum					
	Time Base Accuracy	$\pm$ 50 ppm over any $\geq$ 1 ms time interval					
	Real Time Sample Rate	Max. : 1GSa/s (4ch model); Per channel 1GSa/s (2ch model)					
	Record Length	10Mpts/CH					
	Acquisition Mode	Normal, Average, Peak Detect, Single					
	Peak Detection	2ns (typical)					
	Average	Selectable from 2 to 256					
X-Y MODE	X-Axis Input	Channel 1 ; Channel 3* ( * : four channel models only )					
	Y-Axis Input	Channel 2 ; Channel 4* ( * : four channel models only )					
	Phase Shift	$\pm$ 3° at 100kHz					
CURSORS AND MEASUREMENT	Cursors	Amplitude, Time, Gating Available; Unit : Seconds(S), Hz(1/S), Phase (Degrees), Ratio(%)					
	Automatic Measurement	38 sets : Pk-Pk, Max, Min, Amplitude, High, Low, Mean, Cycle Mean, RMS, Cycle RMS, Area, Cycle Area, ROVShoot, FOVShoot, RPREShoot, FPREShoot, Frequency, Period, RiseTime, FallTime, +Width, -Width, Duty Cycle, +Pulses, -Pulses, +Edges, -Edges, %Flicker, Flicker Idx., FRR, FRF, FFR, FFF, LRR, LRF, LFR, LFF, Phase Cursors measurement					
	Control Panel Function	Cursors measurement					
	Auto Counter	6 digits, range from 2Hz minimum to the rated bandwidth					
	Autoset	Single-button, automatic setup of all channels for vertical, horizontal and trigger systems, with undo Autoset					
	Save Setup	20set					
	Save Waveform	24set					
DISPLAY SYSTEM	TFT LCD Type	8" TFT LCD WVGA color display					
	Display Resolution	800 horizontal x 480 vertical pixels (WVGA)					
	Interpolation	Sin(x)/x					
	Waveform Display	Dots, Vectors, Variable persistence(16ms–10s), Infinite persistence					
	Waveform Update Rate	120,000 waveforms per second, maximum					
	Display mode	YT ; XY					
	Display Graticule	8 x 10 divisions					
INTERFACE	USB Port	USB 2.0 Full-speed host port x 1, USB High-speed 2.0 device port x 1					
	Ethernet Port (LAN)	RJ-45 connector, 10/100Mbps with HP Auto-MDIX					
	Go/NoGo BNC	5V Max/10mA TTL open collector output					
	Kensington Style Lock	Rear-panel security slot connects to standard Kensington-style lock					
LOGIC ANALYSER SPECIFICATIONS	Sample Rate	Per Channel 1GSa/s					
	Bandwidth	200MHz					
	Record Length	Per Channel 10M pts (max)					
	Input Channels	16 Digital (D15 - D0)					
	Trigger Type	Edge, Pattern, Pulse Width, Serial bus (I <sup>2</sup> C, SPI, UART(RS232/422/485), CAN, LIN), Parallel Bus					
	Thresholds Quad	D0–D3, D4–D7,D8–D11 ,D12–D15 Thresholds					
	Threshold Selections	TTL, CMOS(5V,3.3V,2.5V), ECL, PECL,0V ,User Defined					
	User-defined Threshold Range	$\pm$ 5V					
	Maximum Input Voltage	$\pm$ 40 V					
	Minimum Voltage Swing	$\pm$ 250 mV					
	Vertical Resolution	1 bit					
AWG SPECIFICATIONS (MSO-2000EA only)	Channels	2					
	Sample Rate	200 Msa/s					
	Vertical Resolution	14 bits					
	Max. Frequency	25 MHz					
	Standard Waveform	Sine, Square, Pulse, Ramp, DC, Noise					
	Built-in ARB Waveform	Sinc, Gaussian, Lorentz, Exponential Rise, Exponential Fall, Haversine, Cardiac					
	Output Range	20 mVpp to 5 Vpp, HighZ;10 mVpp to 2.5 Vpp, 50 $\Omega$					
	Output Resolution	1mV					
	Output Accuracy	2% (1 kHz)					
	Offset Range	$\pm$ 2.5 V, HighZ; $\pm$ 1.25 V, 50 $\Omega$					
	Offset Resolution	1mV					
POWER SOURCE MISCELLANEOUS	Line Voltage Range	AC 100V ~ 240V, 48Hz ~ 63Hz, auto selection					
	Multi-Language Menu	Available					
	On-Line Help	Available					
	Time clock	Time and date, provide the date/time for saved data					
	Operation Environment	Temperature: 0°C to 50°C. Relative Humidity: $\leq$ 80%, 40°C or below; $\leq$ 45%, 41°C ~ 50°C					
DIMENSIONS & WEIGHT	384(W) X 208(H) X 127.3(D)mm, Approx. 2.8 kg						

DIMENSIONS & WEIGHT 384(W) X 208(H) X 127.3(D)mm, Approx. 2.8 kg

Note : Three-year warranty, excluding probes & LCD display panel.

Specifications subject to change without notice.

MSO2000GD1DH

## ORDERING INFORMATION

MSO-2204E(A)	200MHz, 4 + 16 Channel, Mixed-signal Oscilloscope
MSO-2202E(A)	200MHz, 2 + 16 Channel, Mixed-signal Oscilloscope
MSO-2104E(A)	100MHz, 4 + 16 Channel, Mixed-signal Oscilloscope
MSO-2102E(A)	100MHz, 2 + 16 Channel, Mixed-signal Oscilloscope
MSO-2074E(A)	70MHz, 4 + 16 Channel, Mixed-signal Oscilloscope
MSO-2072E(A)	70MHz, 2 + 16 Channel, Mixed-signal Oscilloscope

"(A)" have built-in a Dual Channel 25MHz Arbitrary Waveform Generator

## ACCESSORIES

Quick start guide, User manual CD x 1, Power cord x 1, <b>GTL-16E</b> : 16-Channel Logic Analyzer Probe	
<b>GTP-070B-4</b> : 70MHz(10:1/1:1) Switchable passive probe for MOS-2072E(A)/2074E(A) (one per channel)	
<b>GTP-100B-4</b> : 100MHz(10:1/1:1) Switchable passive probe for MOS-2102E(A)/2104E(A) (one per channel)	
<b>GTP-200B-4</b> : 200MHz(10:1/1:1) Switchable passive probe for MOS-2202E(A)/2204E(A) (one per channel)	

## OPTIONAL ACCESSORIES

<b>GTL-16E</b> 16-Channel Logic Analyzer Probe	<b>GCP-100</b> Current Probe, DC ~ 100K, 100A, Current Probe
<b>GRA-426</b> Rack Adapter Panel	<b>GCP-1030</b> Current Probe, DC ~ 100MHz, 30Arms, Current Probe
<b>GAK-003</b> 50 $\Omega$ Impedance Adapter	<b>GCP-206P</b> Current Probe - Power Supply, 2 Channel Power Supply for GCP-530/1030
<b>GSC-008</b> Soft Carrying Case	<b>GCP-425P</b> Current Probe - Power Supply, 4 Channel Power Supply for GCP-530/1030
<b>GTL-246</b> USB Cable, USB 2.0, A-B Type, 1200mm	<b>GCP-530</b> Current Probe, DC ~ 50MHz, 30Arms, Current Probe for GCP-530/1030
<b>GDB-03</b> Oscilloscope Education & Training Kit	<b>GDP-025</b> Differential Probe, 25M High Voltage Differential Probe
<b>GTP-033A</b> Oscilloscope Probe, 35MHz 1:1 Passive Probe, BNC(P/M)	<b>GDP-050</b> Differential Probe, 50M High Voltage Differential Probe
<b>GCP-005</b> Current Probe, 40Hz~1kHz, 5A, Current Probe	<b>GDP-100</b> Differential Probe, 100M High Voltage Differential Probe
<b>GCP-020</b> Current Probe, 40Hz~40kHz, 240A, Current Probe	

## FREE DOWNLOAD

<b>PC Software</b>	OpenWave software	<b>Driver</b>	USB driver ; LabView driver
--------------------	-------------------	---------------	-----------------------------

Global Headquarters

**GOOD WILL INSTRUMENT CO., LTD.**

No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan

T +886-2-2268-0389 F +886-2-2268-0639

E-mail: marketing@goodwill.com.tw



www.gwinstek.com



www.facebook.com/GWInstek

**GW INSTEK**  
Simply Reliable