



Z-LINE Z102

Potentiometric Current / Voltage converter

Z-LINE

Standard converters




CE

- ▶ INPUT: Resistance with connection
 - Rheostat (2 wire), ranges 0 – 300 ohms ($I = 6 \text{ mA}$),
0–500 ohms ($I = 3.6\text{mA}$) and 0 – 1 Kohm ($I = 1.8 \text{ mA}$)
 - Potentiometer (3 wire, 1 M Ω) $V_{ref} = 1.8 \text{ Vdc}$
- ▶ OUTPUT: current 0..20, 4..20 mA
voltage 0..5, 1..5, 0..10, 2..10 Vdc
- ▶ ACCURACY: 0,2%
- ▶ Galvanic isolation @ 3-way
- ▶ Screw-fit terminals removable
- ▶ Din rail mounting
- ▶ Power supply: 19..40 Vdc, 19..28 Vac

TECHNICAL DATA

Z102 – Potentiometric DC Current / Voltage converter

CE

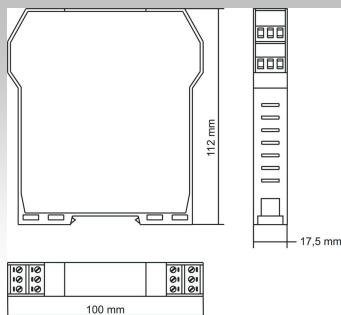

ORDER CODE

Cod. Z102

GENERAL FEATURES

Power supply	19÷40Vdc, 19÷28 Vac
Channels	N.1
Accuracy	< 0,2%
Status indicators	Power
Galvanic Isolation	Power supply // input // output at 1500 Vac, digital
Hot swapping	Yes
Power consumption	2,5 W
Installation class	2
Protections	Surges: 400W/ms. Loop supply short-circuit protected
Humidity	30..90% a +40°C (not condensing)
Approvals	CE


INPUT

Resistance with connection

- Rheostat (2 wire), ranges 0 – 300 ohms ($I = 6 \text{ mA}$), 0–500 ohms ($I = 3.6 \text{ mA}$) and 0 – 1 Kohm ($I = 1.8 \text{ mA}$)
- Resistance with connection to potentiometer (3 wires) ($V_{ref} = 1.8 \text{ Vdc}$)


DIMENSIONS AND INSTALLATION

Application

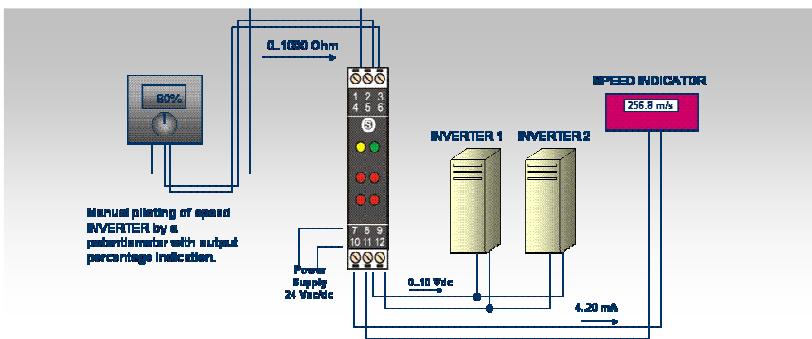


Input


Rheostat (2 wire)



Potentiometer (3 wire)




Power supply




Output

Current – active output



Current – passive output



Voltage

