



# SMALLEST & LIGHTEST 5 GAS MONITOR

## Gas Detection For Life

## GX-3R Pro Model



### Features

- **Smallest & lightest 5 gas monitor**
  - 2.9" W x 2.6" H x 1.06" D , 4.58 ounces
- **Simultaneous detection of 5 gases**
  - Confined Space Gases: *LEL, O2, H2S, CO*
  - Toxic/IR Gases: *HCN, NO2, PH3, SO2, and CO2*
  - H2 Compensated CO sensor available
- **Simple 2-button operation**
- **Bluetooth communication with iOS & Android App**
- **Non-Compliance Indicator**
- **3 user adjustable alarm levels**
- **Panic Alarm**
- **Man Down Alarm**
- **Impact resistant body**
- **Large full dot, auto-backlit display with auto-rotation**
- **Stealth mode for law enforcement**
- **Field replaceable sensors & filters**
- **Water and dust resistant design, IP66/68**
- **3 Year Warranty**

**5** World's Smallest and Lightest  
**Gas Monitor**

### Applications


- **Personal monitoring**
- **Confined spaces**
- **Refineries / petrochemical**
- **Utilities**
- **Oil and Gas**
- **Water / wastewater**
- **Fire services**
- **Construction**

The GX-3R Pro is the world's smallest 5-gas monitor weighing only 4.58 ounces and fits in the palm of your hand (2.9" W x 2.6" H x 1.06" D). It simultaneously monitors and displays 5 different gases. In addition to monitoring standard confined space gases, LEL, O2, CO, & H2S, the GX-3R Pro has a 5th channel where you can add infrared or toxic gas sensors. Two of the four sensor slots have interchangeable sensors providing flexible configurations, which can easily be changed in the field.

The GX-3R Pro comes equipped with Bluetooth wireless communication, man-down alarm, the choice of alkaline or rechargeable power supply, and a 3 year warranty. The Lithium-ion battery pack will operate for 25 hours and will fully charge in 3 hours.

The GX-3R Pro utilizes Bluetooth communication to display direct gas readings from the instrument to a phone app, which is available free on either iOS or Android phones. Automatic notifications can be programmed to send text or email messages if there is an alarm event from the GX-3R Pro.

Safety supervisors will appreciate the non-compliance indicator. The instrument flashes it's 3 LED lights every 30 seconds in the following conditions; if the instrument has not been bump tested, or if calibration is due, or if there was a gas alarm event. The 3 LED lights will continue to flash once every 30 seconds until the non-compliance condition has been resolved. The 30 second interval is adjustable.

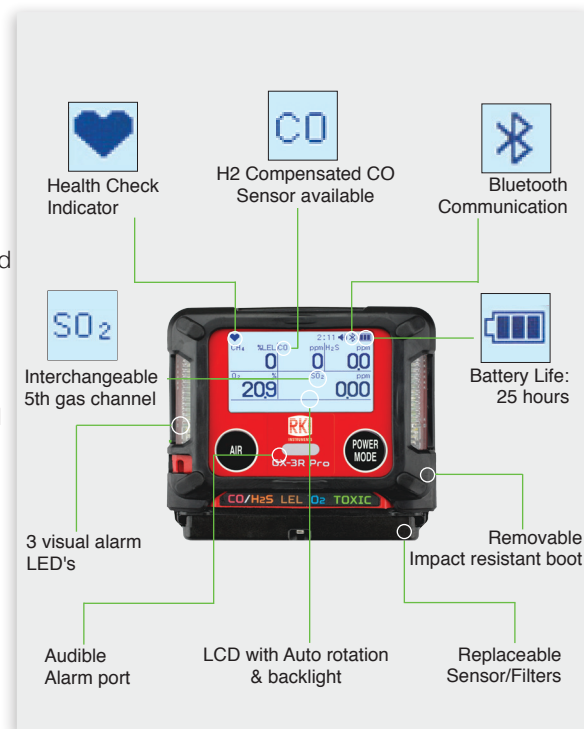

RKI Instruments, Inc. • 33248 Central Ave. Union City, CA 94587 • Phone (510) 441-5656 • (800) 754-5165 • Fax (510) 441-5650

World Leader In Gas Detection & Sensor Technology  
[www.rkiinstruments.com](http://www.rkiinstruments.com)

# GX-3R Pro Model

Detectable Gases					Common Specifications													
Gas		Measuring Range (Increments)	Accuracy Statement	Preset Alarms		Sampling Method		Display										
<b>Sensor Slot 1: Carbon Monoxide (CO) &amp; Hydrogen Sulfide (H2S) *Interchangeable</b>																		
H2S / CO	Dual EC	0 ~ 2000 ppm (1 ppm)	± 5% of reading or ± 5 ppm CO	A1: 25 ppm A2: 50 ppm A3: 1200 ppm	STEL: 200 ppm TWA: 25 ppm	Full dot LCD with Autobacklight and Autorotation												
		0 ~ 200.0 ppm (0.1 ppm)	± 5% of reading or ± 2 ppm H2S	A1: 5 ppm A2: 30 ppm A3: 100 ppm	STEL: 5.0 ppm TWA: 1.0 ppm													
H2S Only	EC	0 ~ 200.0 ppm (0.1 ppm)	± 5% of reading or ± 2 ppm H2S	A1: 5 ppm A2: 30 ppm A3: 100 ppm	STEL: 5.0 ppm TWA: 1.0 ppm	<table border="1"> <thead> <tr> <th>Gas Alarm</th> <th>Trouble Alarm</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> <li>• 2 increasing alarms</li> <li>• STEL</li> <li>• TWA</li> <li>• Overscale alarm</li> <li>• O2 decreasing/increasing</li> </ul> </td> <td> <ul style="list-style-type: none"> <li>• Sensor disconnection</li> <li>• Low battery</li> <li>• Circuit error</li> <li>• Calibration range error</li> <li>• Cal or bump due alarm</li> </ul> </td> </tr> </tbody> </table>				Gas Alarm	Trouble Alarm	<ul style="list-style-type: none"> <li>• 2 increasing alarms</li> <li>• STEL</li> <li>• TWA</li> <li>• Overscale alarm</li> <li>• O2 decreasing/increasing</li> </ul>	<ul style="list-style-type: none"> <li>• Sensor disconnection</li> <li>• Low battery</li> <li>• Circuit error</li> <li>• Calibration range error</li> <li>• Cal or bump due alarm</li> </ul>					
Gas Alarm	Trouble Alarm																	
<ul style="list-style-type: none"> <li>• 2 increasing alarms</li> <li>• STEL</li> <li>• TWA</li> <li>• Overscale alarm</li> <li>• O2 decreasing/increasing</li> </ul>	<ul style="list-style-type: none"> <li>• Sensor disconnection</li> <li>• Low battery</li> <li>• Circuit error</li> <li>• Calibration range error</li> <li>• Cal or bump due alarm</li> </ul>																	
CO H2 Compensated	EC	0 ~ 2,000 ppm	± 5% of reading or ± 2 ppm CO	A1: 25 ppm A2: 50 ppm A3: 1200 ppm	STEL: 200 ppm TWA: 25 ppm													
<b>Sensor Slot 2: Combustibles (Methane as standard)</b>																		
CH4 / HC	Catalytic	0 ~ LEL (1% LEL)	± 5% of reading or ± 2 % LEL	1st: 10% LEL 3rd: 50% LEL	2nd: 25% LEL Over: 100% LEL	<table border="1"> <thead> <tr> <th>Gas Alarm</th> <th>Trouble Alarm</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> <li>• Flashing LED's</li> <li>• Continuous buzzer (100 db @ 30cm)</li> <li>• Flashing gas value</li> <li>• Vibration</li> </ul> </td> <td> <ul style="list-style-type: none"> <li>• Flashing LED's</li> <li>• Intermittent buzzer (95 db @ 30cm)</li> <li>• Display of error message</li> </ul> </td> </tr> </tbody> </table>				Gas Alarm	Trouble Alarm	<ul style="list-style-type: none"> <li>• Flashing LED's</li> <li>• Continuous buzzer (100 db @ 30cm)</li> <li>• Flashing gas value</li> <li>• Vibration</li> </ul>	<ul style="list-style-type: none"> <li>• Flashing LED's</li> <li>• Intermittent buzzer (95 db @ 30cm)</li> <li>• Display of error message</li> </ul>					
Gas Alarm	Trouble Alarm																	
<ul style="list-style-type: none"> <li>• Flashing LED's</li> <li>• Continuous buzzer (100 db @ 30cm)</li> <li>• Flashing gas value</li> <li>• Vibration</li> </ul>	<ul style="list-style-type: none"> <li>• Flashing LED's</li> <li>• Intermittent buzzer (95 db @ 30cm)</li> <li>• Display of error message</li> </ul>																	
O2	EC	0 ~ 40.0% Vol. (0.10%)	± 0.5% O2	Low 1: 19.5% Low 2: 18.0%	High: 23.5% Over: 40.0%													
<b>Sensor Slot 3: Oxygen (O2)</b>																		
<b>Sensor Slot 4: Toxics &amp; CO2 *Interchangeable</b>																		
HCN	EC	0 ~ 30.0 ppm (0.1 ppm)	± 10% of reading or ± 5 % of full scale	A1: 5.0 ppm A2: 10.00 ppm A3: 30.00 ppm	STEL: 10 ppm TWA: 4.7 ppm	<table border="1"> <thead> <tr> <th>Config</th> <th>Li-ion</th> <th>Alkaline</th> </tr> </thead> <tbody> <tr> <td>4-gas + EC</td> <td>25 hours</td> <td>16 hours</td> </tr> <tr> <td>4-gas + IR</td> <td>16 hours</td> <td>7 hours</td> </tr> </tbody> </table>				Config	Li-ion	Alkaline	4-gas + EC	25 hours	16 hours	4-gas + IR	16 hours	7 hours
Config		Li-ion		Alkaline														
4-gas + EC		25 hours		16 hours														
4-gas + IR		16 hours		7 hours														
NO2	0 ~ 20.00 ppm (0.05 ppm)	A1: 2.00 ppm A2: 4.00 ppm A3: 20.00 ppm	STEL: 1.0 ppm TWA: 0.50 ppm															
PH3	0 ~ 20.00 ppm (0.01 ppm)	A1: 0.30 ppm A2: 0.60 ppm A3: 0.60 ppm	STEL: 1.0 ppm TWA: 0.30 ppm															
SO2	0 ~ 100.0 ppm (0.05 ppm)	A1: 2.00 ppm A2: 5.00 ppm A3: 100.00 ppm	STEL: 5.0 ppm TWA: 2.00 ppm															
CO2 %	IR	0 ~ 10.0% Vol. (0.01%)	± 5% of reading or ± 2 ppm	A1: 0.50% Vol. A2: 3.00% Vol. A3: 4.00% Vol.	STEL: 3.00% Vol. TWA: 0.50% Vol.	<table border="1"> <thead> <tr> <th>Operating Temp. &amp; Humidity</th> </tr> </thead> <tbody> <tr> <td>-20°C ~ +50°C [-4°F ~ +122°F] 10 to 90% RH, non-condensing (continuous environment)</td> </tr> <tr> <td>-40°C ~ +60°C [-40°F ~ +140°F] 0 to 95% RH, non-condensing (temporary environment)</td> </tr> </tbody> </table>				Operating Temp. & Humidity	-20°C ~ +50°C [-4°F ~ +122°F] 10 to 90% RH, non-condensing (continuous environment)	-40°C ~ +60°C [-40°F ~ +140°F] 0 to 95% RH, non-condensing (temporary environment)						
Operating Temp. & Humidity																		
-20°C ~ +50°C [-4°F ~ +122°F] 10 to 90% RH, non-condensing (continuous environment)																		
-40°C ~ +60°C [-40°F ~ +140°F] 0 to 95% RH, non-condensing (temporary environment)																		
CO2 ppm	0 ~ 10,000 ppm (20 ppm)	A1: 5,000 ppm A2: N/A	STEL: N/A TWA: N/A															
					<table border="1"> <thead> <tr> <th>Response Time</th> </tr> </thead> <tbody> <tr> <td>Within 30 seconds (T90)</td> </tr> </tbody> </table>					Response Time	Within 30 seconds (T90)							
Response Time																		
Within 30 seconds (T90)																		
					<table border="1"> <thead> <tr> <th>Power Source</th> </tr> </thead> <tbody> <tr> <td>4-gas + EC</td> </tr> <tr> <td>4-gas + IR</td> </tr> </tbody> </table>					Power Source	4-gas + EC	4-gas + IR						
Power Source																		
4-gas + EC																		
4-gas + IR																		
					<table border="1"> <thead> <tr> <th>Dimension &amp; Weight</th> </tr> </thead> <tbody> <tr> <td>2.9" W x 2.6" H x 1.06" D (Approx. 73 W x 65 H x 26 D mm), 4.58oz (with rubber boot)</td> </tr> </tbody> </table>					Dimension & Weight	2.9" W x 2.6" H x 1.06" D (Approx. 73 W x 65 H x 26 D mm), 4.58oz (with rubber boot)							
Dimension & Weight																		
2.9" W x 2.6" H x 1.06" D (Approx. 73 W x 65 H x 26 D mm), 4.58oz (with rubber boot)																		
					<table border="1"> <thead> <tr> <th>Case Material</th> </tr> </thead> <tbody> <tr> <td>Explosion proof, dust and water resistant to IP-66/68 (2m,1h) approval. Drop height 23 ft</td> </tr> </tbody> </table>					Case Material	Explosion proof, dust and water resistant to IP-66/68 (2m,1h) approval. Drop height 23 ft							
Case Material																		
Explosion proof, dust and water resistant to IP-66/68 (2m,1h) approval. Drop height 23 ft																		
					<table border="1"> <thead> <tr> <th>Bluetooth Communication</th> </tr> </thead> <tbody> <tr> <td>BLE: with iOS and Android phone app: <i>RK Link</i></td> </tr> </tbody> </table>					Bluetooth Communication	BLE: with iOS and Android phone app: <i>RK Link</i>							
Bluetooth Communication																		
BLE: with iOS and Android phone app: <i>RK Link</i>																		
					<table border="1"> <thead> <tr> <th>Datalogging</th> </tr> </thead> <tbody> <tr> <td>Logs user ID, station ID, Calibration &amp; Bump Test history, Alarm Events &amp; Alarm Trends</td> </tr> </tbody> </table>					Datalogging	Logs user ID, station ID, Calibration & Bump Test history, Alarm Events & Alarm Trends							
Datalogging																		
Logs user ID, station ID, Calibration & Bump Test history, Alarm Events & Alarm Trends																		
					<table border="1"> <thead> <tr> <th>Standard Accessories</th> </tr> </thead> <tbody> <tr> <td>Alligator clip, protective rubber boot, charger, calibration adapter</td> </tr> </tbody> </table>					Standard Accessories	Alligator clip, protective rubber boot, charger, calibration adapter							
Standard Accessories																		
Alligator clip, protective rubber boot, charger, calibration adapter																		
					<table border="1"> <thead> <tr> <th>Optional Accessories</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> <li>• Padded carrying case</li> <li>• RP-3R Attachable sampling Pump with 4" rubber nipple, 10' hose and probe (up to 40' hose available)</li> <li>• USB to IrDA downloading cable for datalogger</li> <li>• SDM-3R calibration station</li> <li>• Hand aspirator</li> </ul> </td> </tr> </tbody> </table>					Optional Accessories	<ul style="list-style-type: none"> <li>• Padded carrying case</li> <li>• RP-3R Attachable sampling Pump with 4" rubber nipple, 10' hose and probe (up to 40' hose available)</li> <li>• USB to IrDA downloading cable for datalogger</li> <li>• SDM-3R calibration station</li> <li>• Hand aspirator</li> </ul>							
Optional Accessories																		
<ul style="list-style-type: none"> <li>• Padded carrying case</li> <li>• RP-3R Attachable sampling Pump with 4" rubber nipple, 10' hose and probe (up to 40' hose available)</li> <li>• USB to IrDA downloading cable for datalogger</li> <li>• SDM-3R calibration station</li> <li>• Hand aspirator</li> </ul>																		
					<table border="1"> <thead> <tr> <th>Safety Design / Approvals</th> </tr> </thead> <tbody> <tr> <td>ATEX, CSA</td> </tr> </tbody> </table>					Safety Design / Approvals	ATEX, CSA							
Safety Design / Approvals																		
ATEX, CSA																		
					<table border="1"> <thead> <tr> <th>Warranty</th> </tr> </thead> <tbody> <tr> <td>Three years material and workmanship including sensors</td> </tr> </tbody> </table>					Warranty	Three years material and workmanship including sensors							
Warranty																		
Three years material and workmanship including sensors																		

\*Specifications subject to change without notice

Calibration Station  
**SDM-3R**



Clip-On Sampling Pump  
**RP-3R**



**INSTRUMENTS**  
Gas Detection For Life

(800) 754-5165

www.rkiinstruments.com

## Authorized Distributor:



Zone Acticentre - Bâtiment H - 156/220  
Rue des Famards - CRT2 - CS 10210 - 59273 FRETIN  
Tél. 03 20 62 06 80 Télécopie : 03 20 96 95 62  
E-mail : [contact@dimeco.com](mailto:contact@dimeco.com)