

SRP-94

- process meter with a large display
- input 0/4-20 mA, 0/1-5V, 0/2-10V
- 0, 2 or 4 relay outputs (or OC)
- RS-485 / Modbus RTU
- option: active current output




The **SRP-94** process meter features current input with protection safeguarding the measuring resistor against damage. The device operates in the following modes: linear, root, square and user defined (max. 20 points). The 24V DC / 100 mA output is used to power the measuring transducers. The RS-485 enables data transmission in production process monitoring systems. 2 or 4 relay (or OC) outputs make it possible to adjust the level of the measured signal. These outputs can be controlled according to one or two threshold values.


- programmable measuring range,
- programmable hystereses and delays of control outputs,
- password protected,
- programmable indication filtration,
- display brightness adjustable in 8 steps,
- overload-protected current input.

Typical applications

- Measuring methane concentration in a biogas plant, activating fan 1 when level I is exceeded, activating fan 2 when level II is exceeded.

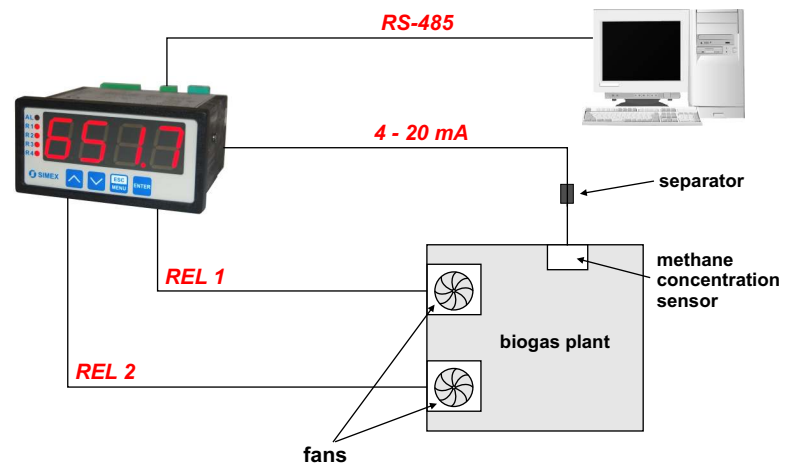

Exemplary pin assignment

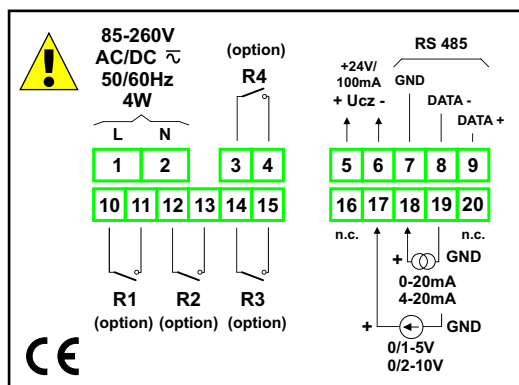

version without 4-20 mA output

Technical data

Power supply: 19V + 50V DC; 16V + 35V AC or 85 + 260V AC/DC
Power consumption: for 85 + 260V AC/DC and 16V + 35V AC power supply: max. 4,5 VA; 19V + 50V DC power supply: max. 4,5 W
Display: LED, red, 4 x 20 mm high
Input: current 0-20 mA or 4-20 mA, programmable, input resistance < 65 Ω (typ. 55 Ω), overload-protected, input current limited to 40 mA;
 voltage 0-5 V, 1-5V, 0-10V or 2-10V, programmable, input resistance > 50 kΩ
Displayed values range: -999 - 9999 + decimal point
Accuracy: ± 0,25% ± one digit in the entire operation range
Outputs: 0, 2 or 4; relays 1A/250V AC (cosφ=1) or the OC 30mA/30VDC/100mW
Transducer power supply output: 24V DC +5%, -10% / max. 100 mA, stabilized, not insulated from measuring inputs
Active current output: operating range max. 0 - 24 mA, load resistance max. 700 Ω (option available with 2 relays, see ordering)
Communication interface: RS-485, 8N1 and 8N2, 1200 bit/s + 115200 bit/s, Modbus RTU, not galvanically isolated from measuring inputs
Operating temperature: 0°C + +50°C
Storage temperature: -10°C + +70°C
Protection class: IP 65 (front side when an additional frame is installed); IP 40 (front side); IP 20 (case and connection clips)
Case: board
Case material: NORYL - GFN2S E1
Case dimensions: 96 x 48 x 100 mm
Panel cut-out dimensions: 90,5 x 43 mm
Installation depth: min. 102 mm
Board thickness: max. 5 mm

Ordering

SRP-94-18XX-1-X-XX1

options:

00 : no options
 01 : IP 65

power supply:

3 : 24V AC/DC
 4 : 85V - 260V AC/DC

number of outputs:

0
 2
 3
 4

type of outputs:

0 : no output
 1 : REL (for 2 and 4 outputs)
 2 : OC (for 2 and 4 outputs)
 3 : 2 x REL + current output
 4 : 2 x OC + current output