

The **BA344D** is a battery powered, intrinsically safe, rate totaliser with separate rate and total displays. An accumulated grand total may also be displayed. The instrument will count switch contact closures, open collector, voltage pulses and the low level output from magnetic pick-offs.

Main application of the BA344D is to process the pulse output from a hazardous area flowmeter, and to display the rate of flow and the total flow in the same or different engineering units. The instrument may be used with any flowmeter having a pulse output proportional to flow rate, such as a turbine flow meter. The instrument is battery powered and requires no external supply, it is therefore ideal for use in remote areas where cable installation would be difficult or expensive. When fitted with optional alarms, the BA344D will perform simple flow batching applications. Rotational speed of hazardous area machinery may also be measured by the BA344D.

Control and programming of the BA344D is performed via four push-buttons which are protected from damage and tampering behind a sealed cover. For applications requiring frequent adjustment, the instrument can be supplied with a robust external membrane keypad. All the programme functions are contained in easy to understand menus which may be protected by a user definable security code. To simplify calibration the rate and total scaling factors employ floating decimal points.

ATEX intrinsic safety certification allows installation in all hazardous areas. The voltage input terminals comply with the requirements for *simple apparatus* and may be connected to almost any certified magnetic pick-off or voltage pulse source. Switch contacts and open collector inputs may also be connected to the BA344D.

The **enclosure**, which is moulded in glass reinforced polyester (GRP), has stainless steel fittings, neoprene gaskets and an armoured glass window. Its robust construction provides IP66 protection, and a separate terminal compartment allows the BA344D to be installed and terminated without exposing the display electronics. To further simplify field wiring and subsequent inspection, the terminal cable entries and clamping screws are forward facing.

Battery life is typically five years but depends upon the application. The BA344D includes a sophisticated power conservation routine which progressively reduces current consumption when input pulses and control commands are not being received. The display includes a low battery warning annunciator which will be activated a few months before the battery is exhausted. If the battery is not replaced, the displayed total and all programme parameters will be automatically stored in the permanent internal memory before the BA344D stops functioning. These parameters will be recovered when a new battery is installed.

Replacement intrinsically safe batteries are available from BEKA associates and may be installed without removing the instrument from the hazardous area. When stored at 20°C less than 1% of battery charge is lost per year, allowing spare batteries to be stored on-site.

Optional alarms provide two galvanically isolated solid state outputs which may be independently programmed for high or low operation on either the rate or total displays. Each output is certified as a separate intrinsically safe circuit and complies with the requirements for *simple apparatus*. Almost any intrinsically safe certified load such as a solenoid valve or sounder may be controlled by these outputs.

BA344D

Battery powered pulse input rate totaliser

Intrinsically safe for use with pulse output flowmeters in all hazardous areas

- *Internal battery lasts for typically 5 years*
- *Magnetic pick-off, switch contact, open collector or voltage pulse input*
- *Separate rate and total displays*
- *Intrinsically safe ATEX certification*
- *IP66 enclosure for surface, pipe or stem mounting*
- *Optional:
Alarms
16 point lineariser
External keypad*
- *3 year guarantee*




BEKA associates

BEKA associates Ltd. Old Charlton Rd. Hitchin, Hertfordshire, SG5 2DA, U.K. Tel. (01462) 438301 Fax (01462) 453971 e-mail sales@beka.co.uk


SPECIFICATION

Input	
Switch contact	
Closed	Less than 100Ω
Open	Greater than 1kΩ
Magnetic pick-off	10mV min peak to peak
Voltage pulse	
Low	Less than 1V
High	Greater than 3V; 30V max
Open collector	
Closed	Less than 2kΩ
Open	Greater than 10kΩ
Frequency	
Switch contact	0.01Hz to 100Hz
Other inputs	0.01Hz to 5kHz max
Display	
Type	Liquid crystal
Rate ~	6 digits 9.5mm high
Decimal point	1 of 5 positions or absent
Total ~	8 digits 14mm high
Decimal point	1 of 7 positions or absent
Grand total	Max count 10 ¹⁶
~Rate or total can be shown on either display	
Internal battery	
Life	
Continuous totalising	Typically 5 years, depends on input frequency and accessories
Remote total reset	
	Contact closure with resistance less than 1kΩ
Programmable functions	
Total dividing scale factor	Adjustable between 0.001 & 99999999
Rate dividing scale factor	Adjustable between 0.001 & 99999999
Rate timebase	Rate may be displayed per second, minute or hour.
Rate display filter	Adjustable digital filter
Intrinsic safety	
Europe ATEX	
Standard	EN50020:1994
Code	Group II, Category 1G
Certificate number	EEx ia IIC T5
Location	ITS01ATEX2017
	Zone 0, 1 or 2
Environmental	
Operating temperature	-20 to 50°C (Certified for use at -40°C)
Enclosure	IP66 see ITS test report C87IV0383A
EMC	In accordance with EU Directive 89/336/EEC.
Immunity	Less than 1% of rate span error at 10V/m
Emissions	Undetectable above background noise
	Class B equipment
Mechanical	
Terminals	Screw clamp for 0.5 to 2.5mm ² cables.
Weight	1.7kg
Accessories	
Alarms	Two independent alarms each of which may be programmed for high or low operation with NC or NO output.
Outputs	Isolated solid state switch
On	Less than 5Ω +0.6V
Off	Greater than 180kΩ
	Certified as <i>simple apparatus</i>
External keypad	Membrane keypad enables instrument to be adjusted without removing the control cover.
Scale legend	Units of measurement marked onto display escutcheon.*
Tag legend	Tag number or applicational information marked onto display escutcheon.*
Stainless legend plate	Stainless steel plate secured to side of instrument, engraved with tagging or applicational information.*

DIMENSIONS (mm)

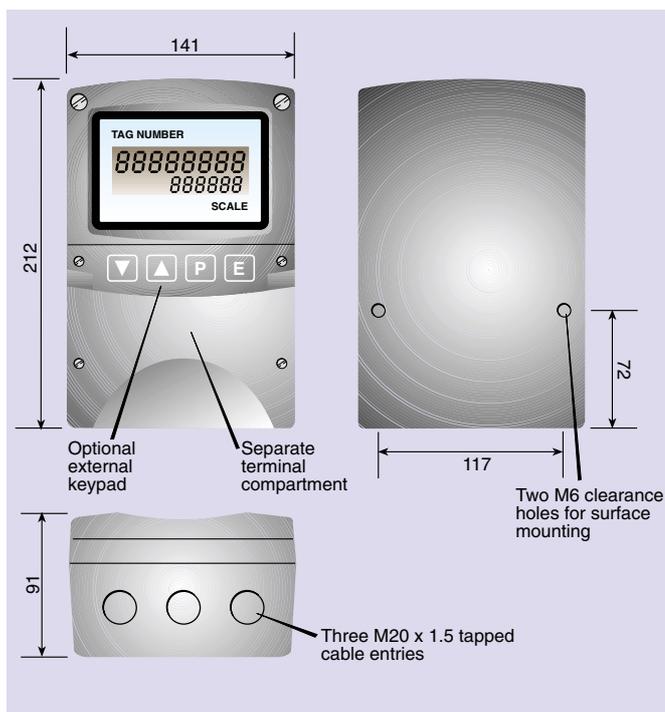

TERMINAL CONNECTIONS

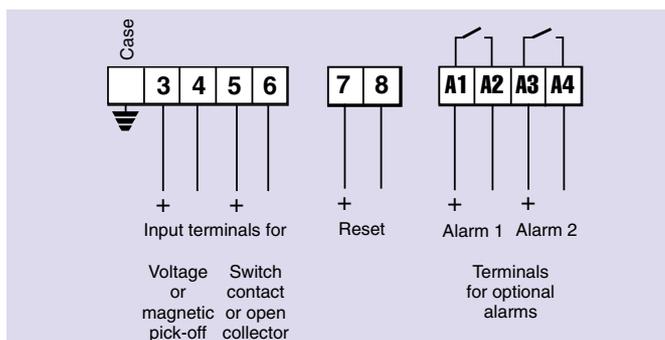

Pipe mounting kit	2 kits are available BA392D and BA393.*
Stem mounting kit	BA395 enables instrument to be mounted directly onto flowmeter.*

* See accessory datasheet for details

HOW TO ORDER

Model number	please specify BA344D
Input	Type
Rate scaling factor	XXXXXXXX #
Total scaling factor	XXXXXXXX #
Rate timebase	Seconds, minutes or hours #
Accessories	
Alarms	please specify Alarms
External keypad	External keypad
Escutcheon marking	
Scale	Scale legend required
Tag	Tag legend required
Stainless legend plate	Legend required
Pipe mounting kit	BA392D or BA393
Stem mounting kit	BA395
Replacement battery	BA491 battery unit

If calibration information is not supplied, instrument will be set for open collector input, with rate timebase of seconds, rate scaling factor of 1 and total scaling factor of 1.