


### FEATURES

- ❖ Real-time operation
- ❖ Low cost
- ❖ Programmable start time
- ❖ Programmable engineering units
- ❖ Reusable
- ❖ Miniature size
- ❖ User-friendly

### APPLICATIONS



- ❖ Low level signal monitoring
- ❖ Medical/Pharmaceutical
- ❖ Battery studies
- ❖ Power supply monitoring
- ❖ Process plants
- ❖ Environmental studies
- ❖ Research and development
- ❖ Replace costly strip chart recorders

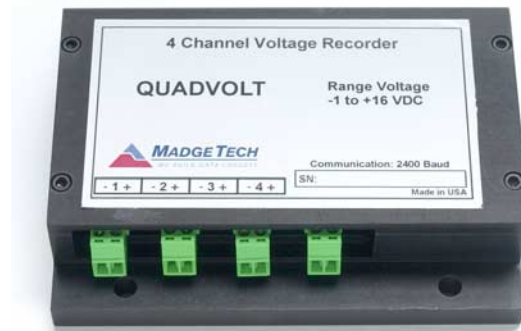

The QUADVOLT is a four channel, battery powered, stand alone voltage recorder. This is an all-in-one compact, portable, easy to use device that will measure and record up to 32,767 measurements per channel. The storage medium is non-volatile solid state memory, providing maximum data security even if the battery becomes discharged. The device can be started and stopped directly from your computer and its small size allows it to fit almost anywhere. The QUADVOLT makes data retrieval quick and easy. Simply plug it into an empty com port and our user-friendly software does the rest.

### SOFTWARE

MadgeTech's Data Recorder Software is an easy to use Windows-based software package that allows the user to effortlessly collect, display and analyze data. A variety of powerful tools allow you to examine, export, and print professional looking data with just a click of the mouse.

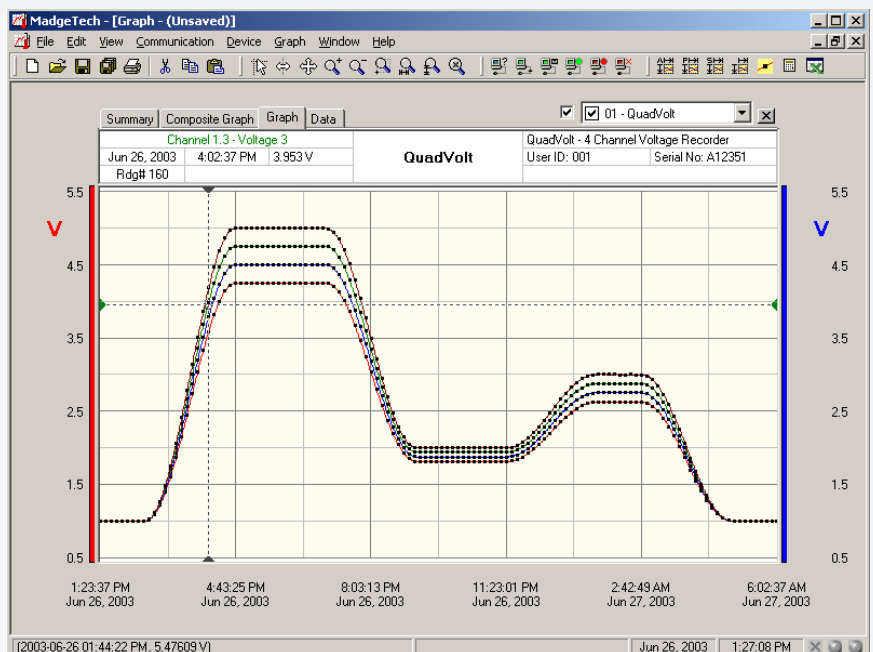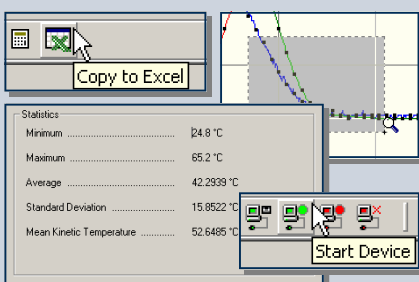

Demo our software at [www.madgetech.com](http://www.madgetech.com)

## QUADVOLT SPECIFICATIONS

<b>Input Connection:</b>	4 removable screw terminals			<b>Memory:</b>	32,767 readings per channel
<b>Model:</b>	<b>2.5V</b>	<b>15V</b>	<b>30V</b>	<b>Reading Interval:</b>	1 reading every second to 1 every 12 hours
<b>Voltage Range:</b>	-0.25 to +2.75	-1.0 to +16.0	-2.0 to +32.0	<b>Real Time Recording:</b>	May be used with PC to monitor and record data in real time
<b>Voltage Resolution:</b>	0.1 mV	0.5 mV	1.0 mV	<b>Calibration:</b>	Digital calibration through software
<b>Calibrated Accuracy:</b>	±0.01 (%FSR)	±0.10 (%FSR)	±0.10 (%FSR)	<b>Calibration Date:</b>	Automatically recorded within device
<b>Input Impedance:</b>	>1 kΩ*	>10 kΩ	>10 kΩ	<b>Power:</b>	9V lithium or alkaline battery included
<b>Overload Protection:</b>	±5 V	±30 V	±48 V	<b>User Replaceable Battery:</b>	1 year typical
<b>Temperature Coefficient:</b>	< 25 ppm/°C	< 250 ppm/°C	< 250 ppm/°C	<b>Data Format:</b>	Date and time stamped V, mV, µV, engineering units specified through software
<b>Analog Conversion Time:</b>	133 ms			<b>Time Accuracy:</b>	±1 minute/month (at 20 °C, RS232 cable not in use)
<b>Frequency Rejection:</b>	60 Hz			<b>Computer Interface:</b>	PC serial or RS232C COM (interface cable required); 2,400 baud
<b>Specified Accuracy Range:</b>	Nominal range @ 25 °C			<b>Software:</b>	Windows 95/98/ME/NT/2000/XP based software
<b>Engineering Units:</b>	User may define units up to 10 characters in length. This value is stored within the device.			<b>Operating Environment:</b>	-40 °C to +80 °C, 0 to 95 %RH non-condensing
<b>Scale Factor:</b>	User may program any desired scaling factor from ±1.000E-31 to ±9.999E+31. The scaling factor is stored within the device.			<b>Dimensions:</b>	3.5" x 4.4" x 1.0" (89 mm x 111 mm x 26 mm)
<b>Start Time:</b>	Software programmable start time and date, up to six months in advance			<b>Weight:</b>	13 oz (370 g)

\*Input impedance is greater than 1 MΩ during acquisition for the QUADVOLT-2.5

## QUADVOLT SOFTWARE FEATURES

<b>Multiple Graphs:</b>	Simultaneously analyze data from several units or deployments; easily switch to a single data series	<b>Statistics:</b>	Calculate averages, min, max, standard deviation, and mean kinetic temperature with the touch of a button
<b>Real-Time Recording:</b>	Collect and display data in real-time while continuing to log	<b>Export Data:</b>	Export data in a variety of common formats, or switch to Excel with a single click
<b>Graphical Cursor:</b>	One click displays readings by time, value, parameter or sample number	<b>Calibration:</b>	Fully digital calibration function automatically stores parameters in device
<b>Data Table:</b>	Instantly access tabular view for detailed dates, times, values, and annotations	<b>Logger Configuration:</b>	Easy set up and launch of data loggers with immediate or delayed start, preferred sample rate, and device ID
<b>Scaling Options:</b>	Autoscale function fits data to the screen, or allows user to manually enter their own values	<b>Communications:</b>	Automatically sets up communications port, or lets user set configuration
<b>Formatting Options:</b>	Change colors, line styles, plotting options, show or hide channels in an instant	<b>Printing:</b>	Automatically print graphical or tabular data

\*\*As part of our commitment to continuous product improvement, MadgeTech reserves the right to change product specifications without notice

### ORDERING INFORMATION

Model	Description
QUADVOLT-2.5	2.5V - 4 Channel Voltage Recorder
QUADVOLT-15	15V - 4 Channel Voltage Recorder
QUADVOLT-30	30V - 4 Channel Voltage Recorder
IFC101	Software, manual and 9-pin computer interface cable

### ASK ABOUT OUR OTHER DATA RECORDERS

<b>Temperature</b>	<b>pH</b>
<b>Humidity</b>	<b>Level</b>
<b>Pressure</b>	<b>Shock/Vibration</b>
<b>Bridge/Strain</b>	<b>Submersible</b>
<b>Current</b>	<b>Intrinsically Safe</b>
<b>Pulse/Event</b>	<b>RF Transmitters</b>
<b>Voltage</b>	<b>Multi-parameter</b>