


### FEATURES

- ❖ N.I.S.T. traceable
- ❖ Real-time operation
- ❖ Low cost
- ❖ Programmable start time
- ❖ Reusable
- ❖ User-friendly

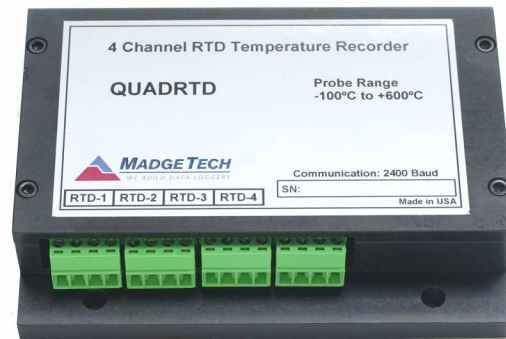



### APPLICATIONS

- ❖ Remote data logging
- ❖ Warehouse monitoring
- ❖ HVAC
- ❖ Medical/Pharmaceutical
- ❖ Museum monitoring
- ❖ Environmental studies
- ❖ Replace costly strip chart recorders
- ❖ Implement HACCP programs

The QUADRTD is a 4 channel, battery powered, stand alone, RTD based, precision temperature recorder. This is an all-in-one compact, portable, easy to use device that will measure and record up to 21,845 measurements per channel. The storage medium is non-volatile solid state memory, providing maximum data security even if the battery becomes discharged. The device can be started and stopped directly from your computer and its small size allows it to fit almost anywhere. The QUADRTD makes data retrieval quick and easy. Simply plug it into an empty com port and our user-friendly software does the rest.

### SOFTWARE

MadgeTech's Data Recorder Software is an easy to use Windows-based software package that allows the user to effortlessly collect, display and analyze data. A variety of powerful tools allow you to examine, export, and print professional looking data with just a click of the mouse.

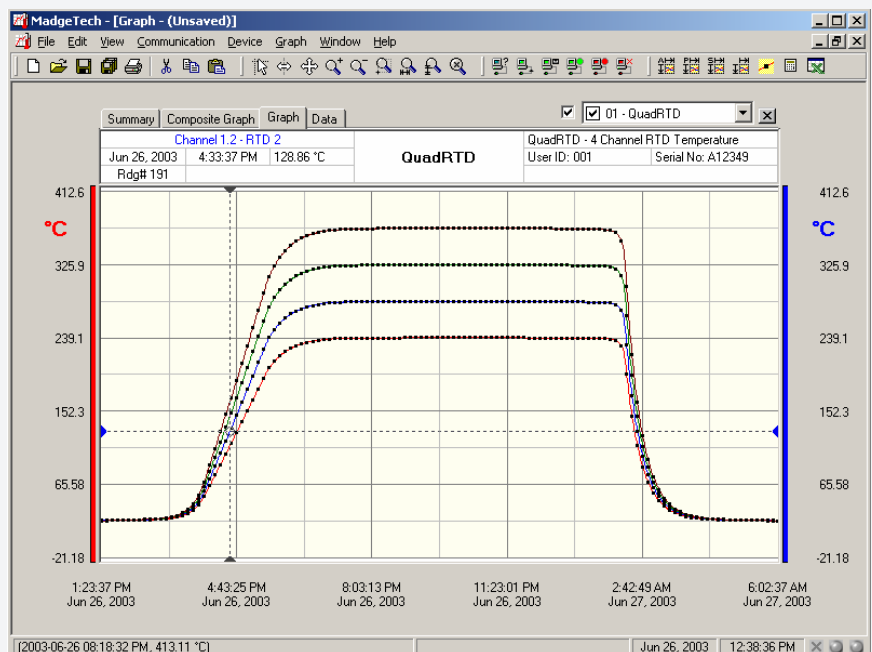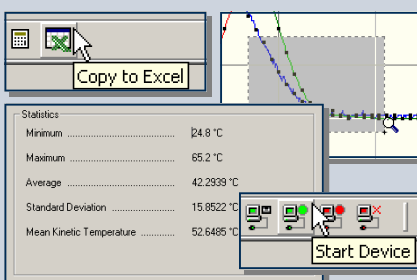

## QUADRTD SPECIFICATIONS

### Temperature\*

**Measurement Range:** -200 °C to +850 °C

**Resolution:** 0.01 °C

**Calibrated Accuracy:** ±0.1 °C @ 25 °C ambient

**Specified Accuracy Range:** -200 °C to +850 °C

### Resistance

**Nominal Range:** 0 Ω to 5000 Ω

**Resolution:** 0.001 Ω

**Calibrated Accuracy:** ±0.015 Ω @ 25 °C ambient

**Specified Accuracy Range:** 0 Ω to 500 Ω

**Channels:** 4

**Input Connection:** Removable screw terminal; 2,3 or 4 wire interface

**Temperature Effect on Span:** < 2.5 ppm/°C; < 1.0 ppm/°C typical

**Temperature Effect on Offset:** < 10 ppm cumulative over -40 °C to +80 °C

**Start Time:** Software programmable start time and date, up to six months in advance

**Real Time Recording:** May be used with PC to monitor and record data in real time

**Memory:** 21,845 readings per channel

**Reading Interval:** 1 reading every 5 seconds to 1 every 12 hours

**Calibration:** Digital calibration through software

**Calibration Date:** Automatically recorded within device

**Power:** 9V lithium or alkaline battery included

**User Replaceable Battery:** 1 year typical

**Data Format:** Date and time stamped °C, °F, °K, °R, Ω

**Time Accuracy:** ±1 minute/month (at 20 °C, RS232 port not in use)

**Computer Interface:** PC serial or RS232C COM (interface cable required); 2,400 baud

**Software:** Windows 95/98/ME/NT/2000/XP based software

**Operating Environment:** -40 °C to +80 °C, 0 to 95 %RH non-condensing

**Dimensions:** 3.5" x 4.4" x 1.0" (89mm x 111mm x 26mm)

**Weight:** 13 oz (370 g)

\*Temperature specifications based on ideal 100 Ω Pt RTD compliant with IEC 751 (1983) and ITS-90, 5000 Ω FSR

## QUADRTD SOFTWARE FEATURES

**Multiple Graphs:** Simultaneously analyze data from several units or deployments; easily switch to a single data series

**Real-Time Recording:** Collect and display data in real-time while continuing to log

**Graphical Cursor:** One click displays readings by time, value, parameter or sample number

**Data Table:** Instantly access tabular view for detailed dates, times, values, and annotations

**Scaling Options:** Autoscale function fits data to the screen, or allows user to manually enter their own values

**Formatting Options:** Change colors, line styles, plotting options, show or hide channels in an instant

**Statistics:** Calculate averages, min, max, standard deviation, and mean kinetic temperature with the touch of a button

**Export Data:** Export data in a variety of common formats, or switch to Excel with a single click

**Calibration:** Fully digital calibration function automatically stores parameters in device

**Logger Configuration:** Easy set up and launch of data loggers with immediate or delayed start, preferred sample rate, and device ID

**Communications:** Automatically sets up communications port, or lets user set configuration

**Printing:** Automatically print graphical or tabular data

\*\*As part of our commitment to continuous product improvement, MadgeTech reserves the right to change product specifications without notice.

### ORDERING INFORMATION

Model	Description
QUADRTD	4 Channel RTD Temperature Recorder
IFC101	Software, manual and 9-pin computer interface cable
N.I.S.T. Cert	N.I.S.T. Calibration Certificate

### ASK ABOUT OUR OTHER DATA RECORDERS

Temperature	Voltage
Humidity	Current
Pressure	Submersible
pH	Intrinsically Safe
Level	RF Transmitters
Shock/Vibration	Multi-parameter
Pulse/Event	