



Zone Acticentre - Bâtiment H - 156/220  
Rue des Farnards - CRT2 - CS 10210 - 59273 FRETIN  
Tél. 03 20 62 06 80 Télécopie : 03 20 96 95 62  
E-mail : [contact@dimelco.com](mailto:contact@dimelco.com)



# Additel 914A

## Handheld Pneumatic Pressure Test Pump

- **Generate 95% vacuum to 375 psi (25 bar) pressure**
- **Portable, only 3.3 lb**
- **Great stability and high resolution**
- **Minimal maintenance**
- **Hand-tight quick connectors**



### OVERVIEW

The 914A Pneumatic Pressure Test Pump is a hand operated pressure pump designed to generate pressure from 95% vacuum to 375 psi (25 bar). A high-quality screw press is designed for fine pressure adjustment, with an adjustment resolution up to 10 Pa (0.1 mbar). A specially designed shut-off valve makes the pressure as stable as possible during calibration. A built-in gas-liquid isolator protects the pump from moisture and dirt to reduce the need for maintenance. Two hand-tight quick connectors installed on the pump allow easy connecting and disconnecting to the test pump without the need for PTFE tape or wrenches. The 914A is an ideal comparison test pump for pressure instruments calibration.

### FEATURES


- **Portable:**  
Only 3.3 lb (1.5 kg)
- **Adjustment Resolution**  
10 Pa (0.1 mbar)  
High-quality screw press for fine pressure adjustment
- **Great Stability**  
A specially designed shut-off valve makes the pressure as stable as possible during calibration
- **Durable and Minimal Maintenance**  
Built-in gas-liquid isolator protects the pump from moisture and dirt
- **Easy-to-use**
- **Hand-tight Quick Connectors**  
Allows easy connecting and disconnecting to the test pump without the need for PTFE tape or wrenches

### SPECIFICATIONS

- **Media:** Air.
- **Generated Pressure Range:** 95% vacuum to 375 psi (25 bar) positive pressure
- **Adjustment Resolution:** 10 Pa (0.1 mbar).
- **Material:** Ram/adapters: SS  
Body: SS, aluminum  
Seals: Buna-N, PTFE, Copper Alloy
- **Piston volume:** 21 ml (1.3 in<sup>3</sup>)
- **Connection**  
Hand-tight connectors for both test gauge and reference gauge.  
1/4NPT female, 1/2NPT female, 1/4BSP female, 1/2BSP female, or M20X1.5 female
- **Dimensions**  
Height: 5.12" (130 mm)  
Base: 9.45" (240 mm) x 4.72" (120 mm)
- **Weight:** 3.3 lb (1.5 kg).
- **Warranty:** 1 year

### ORDERING INFORMATION

#### Model Number

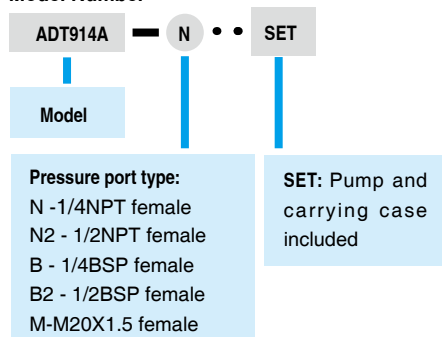

#### Accessories included

O-ring: 20 pcs  
Manual: 1 pc  
Carrying case (914A-X-SET models only)

#### Optional Accessories

| Model number  | Description  |
|---------------|--|
| ADT102        | Adapters and fittings, 1/4NPT male to various male and female connection (25 pcs).   |
| ADT103        | Adapters and fittings, 1/4NPT (1/2NPT, 1/4BSP, 1/2BSP, or M20X1.5) male to various female hand-tight quick connectors (10 pcs).                                  |
| ADT100-HTK-8K | Hose test kit, 5 feet flexible hose, 8,000 psi, user selectable male (1/4NPT, 1/2NPT, 1/4BSP, 1/2BSP, M20) to user selectable female hand tight quick connector. |
| 9901-914      | Carrying Case for one 914A pump and two 681 gauges or 672 calibrators  |
| ADT914A-MK    | Maintenance kit for Additel 914A pump  |

Note: For oil free applications contact Additel.