

## Resistance thermometer MiniTherm

with threaded connection

Type series GA270.



SIL2

### Application area

- Water / wastewater
- General process technology
- Machinery construction

### Features

- Resistance thermometer for invasive temperature measurement in tanks and pipes
- Pt100 directly integrated into a sensor tube
- Compact design
- High measurement accuracy
- Fast response
- Measuring resistor 1 x Pt100 or 2 x Pt100, class A
- Circular connector M12

### Options

- Approvals/Certificates
  - Explosion protection
  - Classification per SIL2
  - Material certificate per EN 10204-3.1
  - Calibration certificate per EN 10204-3.1
- Output signal 4...20 mA via transmitter PA2430
- Output signal IO-Link V1.1 via transmitter PA2530
- Various transmitters can be integrated
- Sensor tube with reduced tip Ø 4 mm

### Application

The resistance thermometer MiniTherm is suited for temperature measuring in tanks and pipes. Because of its compact design and high accuracy MiniTherm is suitable for use in a great number of technological processes.

## Technical data

### Constructional design

Design:	Pt100 directly integrated into a sensor tube, various types of process connections are available
El. connection:	Circular connector M12 (4-pin) Option: Circular connector M12 (8-pin) for 2 x Pt100  Further electrical connections upon request.
Working pressure:	max. 40 bar

### Measuring insert

Design:	Sensor tube Ø 6 mm Option: Sensor tube with reduced tip Ø 4 mm Length see order code.
Measuring resistor:	<ul style="list-style-type: none"> <li>■ Pt100 per EN 60751, class A 3-wire</li> <li>■ Pt100 per EN 60751, class A 4-wire (3-wire bridged)</li> <li>■ 2 x Pt100 per EN 60751, class A 3-wire</li> </ul>
Degree of protection per EN 60529:	IP 67

### Output signal transmitter

Output signal 4...20 mA :  
Detailed informations about transmitter type PA2430 see product page on [www.labom.com](http://www.labom.com).  
Output signal IO-Link V1.1:  
Detailed informations about transmitter type PA2430 see product page on [www.labom.com](http://www.labom.com).

### Process connection

Design:	See order code
---------	----------------

### Material wetted parts

Material:	Stainless steel mat.-no. 1.4404 (316L)
-----------	--

### Accuracy

Pt100:	Per EN 60751, class A
Response time:	Per EN 60751, test procedure with flowing water (without transmitter) Sensor tube Ø 6 mm: $T_{90} = 5.5 \text{ s}$  Sensor tube with reduced tip Ø 4 mm: $T_{90} = 4.5 \text{ s}$

### Temperature ranges

Ambient: <sup>1</sup>	-40...85 °C
Media:	-50...200 °C
Storage: <sup>1</sup>	-40...85 °C

<sup>1</sup> Different temperature ranges for devices with transmitter (see data sheets for the types PA2430 or PA2530).

### Transmitter

Installation variants:	<ul style="list-style-type: none"> <li>■ Transmitter, Type PA2430, for circular connector M12</li> <li>■ Transmitter, Type PA2530 IO-Link, for circular connector M12</li> <li>■ Transmitter head mounted, Type series PA210., 4...20 mA, programmable</li> <li>■ Transmitter head mounted, Type series PA220., electrically isolated, classification per SIL2</li> <li>■ Transmitter head mounted, Type series PA230., electrically isolated, classification per SIL2, HART®</li> <li>■ Transmitter head mounted, Type series PA2420, 2 channel, classification per SIL2/3, HART®</li> </ul>
------------------------	---


### Tests and certificates

SIL2:	Functional safety: per EN 61508, classification of Pt100 sensor per SIL2, suitable transmitter upon request
Ex approval	TÜV 08 ATEX 554093 X Ⓢ II 1G Ex ia IIC T6 /T5/T4 Ga Ⓢ II 2G Ex ib IIC T6 /T5/T4 Gb Ⓢ II 1D Ex ia IIIC T89 °C Da Ⓢ II 2D Ex ib IIIC T129 °C Db $U_i \leq 30 \text{ V}$ $P_i \leq 200 \text{ mW}$ Ci and Li are negligible small (not for devices with transmitter)


## Connection diagram

### Circular connector M12


1 x Pt100, 3-wire

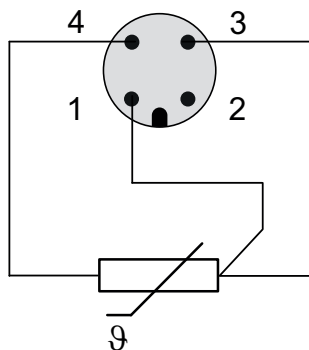


1 x Pt100, 4-wire  
(3-wire bridged)

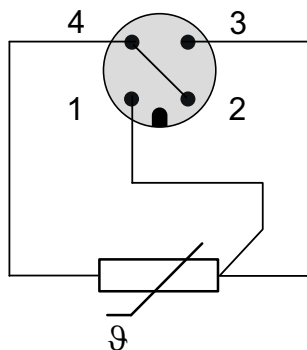


2 x Pt100, 3-wire

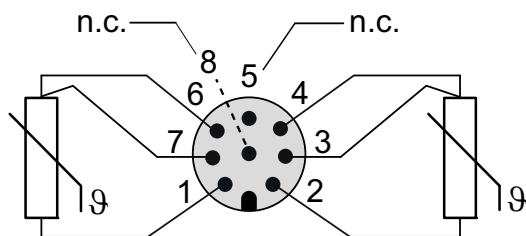

Transmitter  
(type series PA2430)



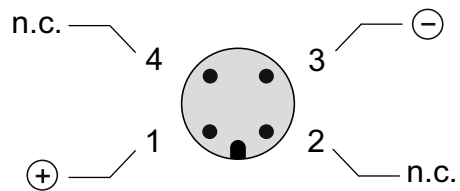


Transmitter IO-Link  
(type series PA2530)

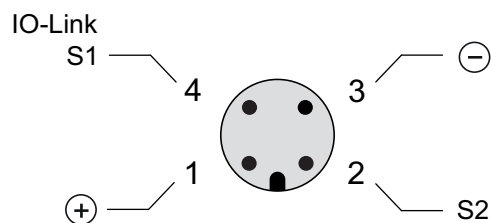

## Dimensions

design with  
transmitter

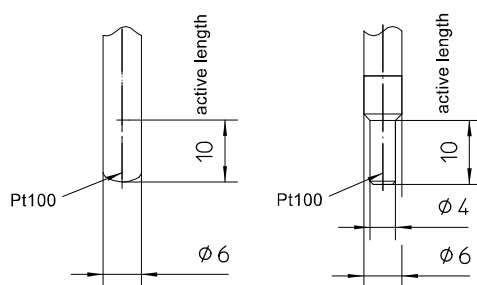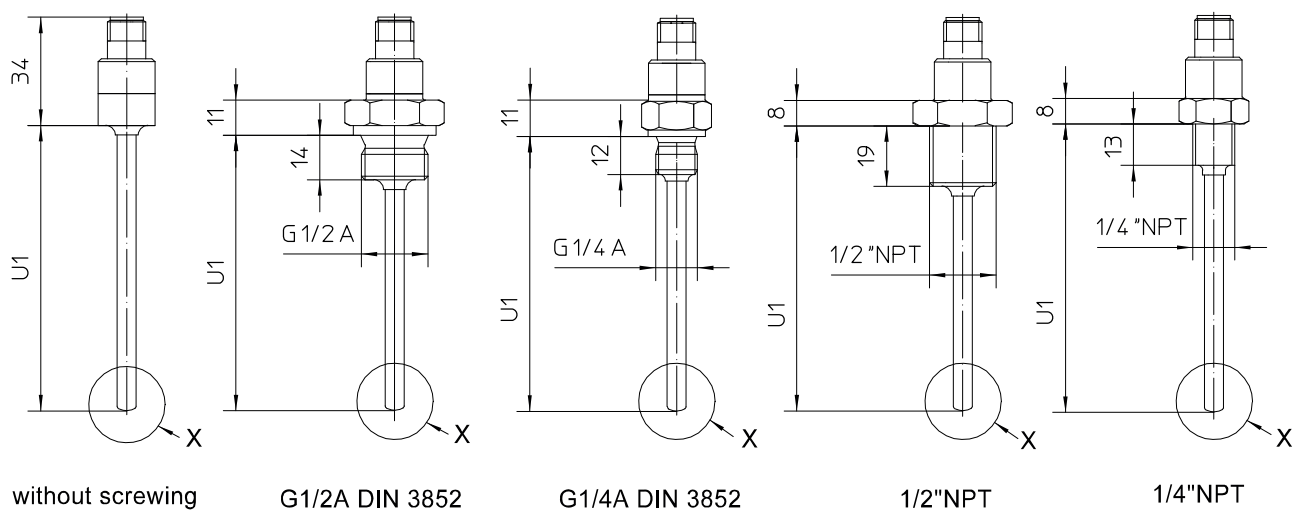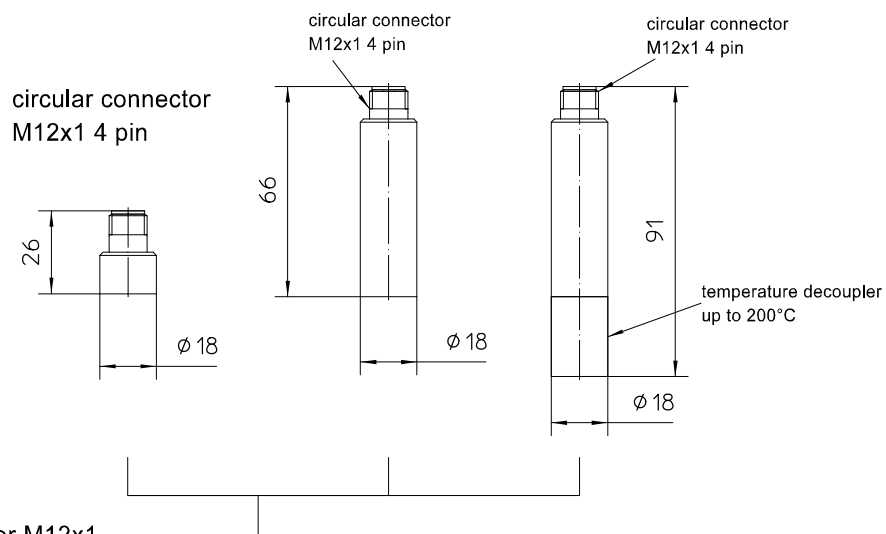

design of stem

### Minimum insertion length U1

Measuring insert	for threaded connection	without screw thread
Ø 6 mm	U1 min = screw thread + 15 mm	U1 min = 15 mm
Ø 6 mm, tapered to Ø 4 mm	U1 min = screw thread + 17 mm	U1 min = 20 mm

## Order details

### Resistance thermometer MiniTherm with threaded connection Type series GA270.

Order details GA270.			
<b>GA270 .</b>	Resistor thermometer MiniTherm with threaded connection		
<b>0</b>	Ex-design	without	
<b>1</b>		explosion protection, design see below	
<b>A3000</b>	process connection	without screwing	
<b>A1006</b>		threaded connection	G1/4 A
<b>A1010</b>			G1/2 A
<b>A1020</b>			1/4" NPT
<b>A1022</b>			1/2" NPT
<b>C1 ...</b>	measuring insert	Ø 6 mm	
<b>C4 ...</b>		Ø 6 mm, reduced design to Ø 4 mm <sup>1</sup>	
<b>025</b>	insertion length U1	25 mm	
<b>030</b>		30 mm	
<b>035</b>		35 mm	
<b>050</b>		50 mm	
<b>100</b>		100 mm	
<b>150</b>		150 mm	
<b>200</b>		200 mm	
<b>990</b>		as in writing	
<b>G11</b>	material	wetted parts stainless steel mat.-no 1.4404 (316L)	
<b>N2</b>	measuring resistor	Pt100, 3-wire	
<b>N3</b>		Pt100, 4-wire (3-wire bridged)	
<b>N5</b>		2 x Pt100, 3-wire <sup>2</sup>	
<b>T150</b>	electrical connection	circular connector M12x1 (4-pin), IP 67	
<b>T151</b>		circular connector M12x1 (8-pin), IP 67 <sup>3</sup>	

Additional features (to be indicated in case of need, only)		
S71	Ex-marking	Ex II 1G Ex ia IIC T6 /T5/T4 Ga
S72		Ex II 2G Ex ib IIC T6 /T5/T4 Gb
S73		Ex II 1D Ex ia IIIC T89 °C Da
S74		Ex II 2D Ex ib IIIC T129 °C Db
W1020	material certificate	per EN 10204-3.1, wetted parts
W1201	calibration certificate	per EN 10204-3.1, 5 measuring points
W2604	functional safety per EN 61508, classification per SIL2	
Z52	transmitter with output signal 4...20 mA <sup>2,4,5</sup>	for media temperatures up to 160 °C, transmitter type PA2430
Z53		with temperature decoupler for media temperatures up to 200 °C, transmitter type PA2430
Z54	transmitter with output signal IO-Link V1.1 <sup>2,4,5</sup>	for media temperatures up to 160 °C, transmitter type PA2530
Z55		with temperature decoupler for media temperatures up to 200 °C, transmitter type PA2530

Order code (example): **GA2700 - A1010 - C1050 - G11 - N2 - T150 ...**

<sup>1</sup> measuring resistor 2 x Pt100 (order code N5) only possible with an insertion length U1 ≥ 40 mm

<sup>2</sup> not for devices with Ex-protection

<sup>3</sup> necessary for measuring resistor 2 x Pt100 (order code N5)

<sup>4</sup> not for devices with classification per SIL2

<sup>5</sup> not possible with circular connector M12x1, 8-pin (order code T151)



**Zone Acticentre – CRT2 – CS 10210**  
**156/220 Rue des Famards - 59273 FRETIN**  
**Tél : 03 20 62 06 80 Fax : 03 20 96 95 62**  
**Mail : [contact@dimelco.com](mailto:contact@dimelco.com)**