

Temperature transmitter GV4 Clamp-on for temperature measurement on pipes Type series GV4610



Features

- Compact case of stainless steel in hygienic design according to recommendations from EHEDG and 3A, degree of protection IP 65/67
- High-resolution graphic display with intuitive operation and backlight
- Patented measuring system for hygienic temperature measurement without medium contact, for pipe Ø 8...300 mm
- Quick access to device data
- Accuracy ≤ 0.25 K
- Temperature range: -40...150 °C
- Output signal 4...20 mA with HART® protocol
- Digital communication via PDM/EDD and FDT/DTM
- Measuring resistor Pt100, class A
- Quick and cost efficient installation
- No additional isolation required
- Measuring insert can be recalibrated, replaceable
- Fast response

Options

- Approvals/Certificates
 - Calibration certificate per EN 10204-3.1
- Degree of protection IP 69K
- Case and front cover of stainless steel 316L
- EAC declaration (upon request)

Application

The temperature transmitter GV4610 Clamp-on is used for temperature measurement and process control, mainly for sterile applications in the food and pharmaceutical industries. The temperature transmitter can be quickly and easily fitted to all existing pipework. There are no changes necessary to the piping and no welding required. The 4 operation buttons allow an easy and fast parameterisation.

Application area

- Pharmaceutical industry
- Food industry
- Biotechnology

Technical data

Constructional design			Process connection		
Design:	Hygienic case of stainless steel, continuously rotatable by $\pm 170^\circ$		Design:	Clamping element designed for installation with :	
Material case and front cover:	<u>Process connection back:</u> Stainless steel mat.-no. 1.4305 (303) Option: stainless steel mat.-no. 1.4404 (316L) <u>Process connection bottom:</u> Stainless steel mat.-no. 1.4301 (304) Option: stainless steel mat.-no. 1.4404 (316L)			<ul style="list-style-type: none"> ■ clamping block for pipes Ø 8...57 mm ■ clamping shoe for pipes Ø 10...300 mm 	
Gasket:	Silicone EPDM / FKM (if degree of protection IP 69K)		Material:	Temperature resistant plastics (PVDF) with integrated isolating system, hygienic design	
Degree of protection per EN 60529:	Case of stainless steel: IP 65/67 Option: IP 69K Clamping element: IP 65		Pipe diameter:	See order code	
Climatic category per EN 60721 3-4:	4K4H		Accuracy		
Material window:	Macrolon hardened Option: Non-splintering glass		Accuracy:	$\leq 0.25 \text{ K}$	
Electrical connection:	Circular connector M12 Option: Cable glands		Temperature influence case:	typ. $0.1 \text{ K} / 10 \text{ K}$	
	<ul style="list-style-type: none"> ■ M16 x 1.5, PA black ■ M16 x 1.5, brass nickel-plated ■ M16 x 1.5, stainless steel ■ M20 x 1.5, PA black ■ M20 x 1.5, brass nickel-plated ■ M20 x 1.5, stainless steel ■ 1/2" NPT, PA black Further connections upon request		Response time per EN 60751 (with flowing water):	$t_{90} = 8\ldots15 \text{ s}$	
Terminal blocks:	Spring clamp terminals up to 2 mm^2				
Type plate:	Adhesive label		We recommend the use of heat sink compound (see Type MT8800).		
Measuring insert			Indication		
Design:	Measuring insert: Ø 6 mm; hygienic design. Measuring insert screwed into the connection head under spring tension.		Display:	<ul style="list-style-type: none"> - High-resolution graphic display with backlight - 4-button operation - Freely configurable display modes - Continuously rotatable - Removable under voltage 	
Material:	Stainless steel Measuring tip of silver, thermally isolated via PEEK element.				
Measuring resistor:	Pt100 per EN 60751, class A				
Output			Device driver:		
				<ul style="list-style-type: none"> ■ EDD for SIMATIC PDM ■ DTM for PACTware or compatible systems (FDT compliance) 	
			Resolution:	$\leq 1 \mu\text{A}$	
			Current sensing-function:	3.55...21.5 mA selectable in steps of 0.001 mA	
			Load R:	$R \leq (U-12V \text{ DC})/0.022 \text{ A} [\Omega]$ U = supply voltage for HART® communication $R \geq 230 \Omega$	

Supply voltage

Functional range: 12...30 V DC, protected against polarity reversal
Ripple: < 5 %

Tests and certificates

- EAC declaration (upon request)

Temperature ranges

Ambient: -20...80 °C
Optional:
-40...80 °C
(Display visibility is limited at temperatures below - 30 °C)
Media: -40...150 °C
Storage: -40...80 °C

Parameterisation

Parameterisation

Parameter	Values	Default setting
Device		
device ID	16 digits, freely selectable	ID:GV4 Clamp-on
Display and control unit		
temperature unit	°C, °F, °R, K	°C
lighting	on, off	on
language	English, German, Chinese	German
decimal point	auto, .xxxx, xx.xxx, xxx.xx, xxxx.x, xxxx	auto
display mode	four values, three values, two values, big display	three values
main value	temperature, current (%), current (mA)	temperature
secondary values	temperature, current (%), current (mA), device ID, Bargraph, HART-TAG, HART descriptor, <empty>	device ID, Bargraph
Current output		
output function	linear, invers	linear
lower range value	at any value within nominal range	0 °C
upper range value	at any value within nominal range	150 °C
lower current limit	3.8...4.0 mA	3.8 mA
upper current limit	20...21 mA	20.5 mA
alarm current	low (< 3.6 mA), high (> 21.0 mA)	low (< 3.6 mA)
HART® data		
HART® address	0...63	0
number of response preambels	5...20	5
current mode	proportional, constant	proportional


Diagnostic functions

loop-test	setting of a fixed current value at the output	3.55...21.5 mA
temperature simulation	setting a fixed temperature value	nominal range
min/max values	for temperature	/


Adjustment

Adjustment type	Description
lower adjustment	adjusts reading of mounted device at ambient temperature (affects zero and span)
upper adjustment	adjusts reading to applied temperature (affects span only)
current adjustment	adjusts current output to achieve 4 resp. 20 mA at the end of the measurement chain


Connection diagram

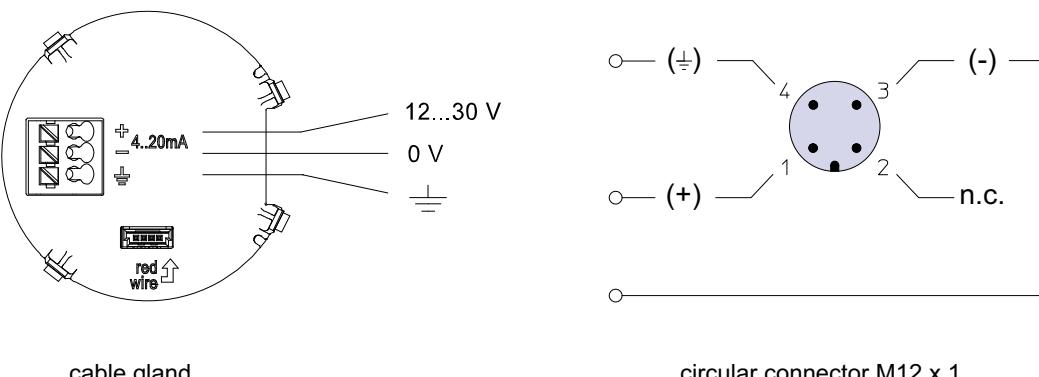



Dimensions

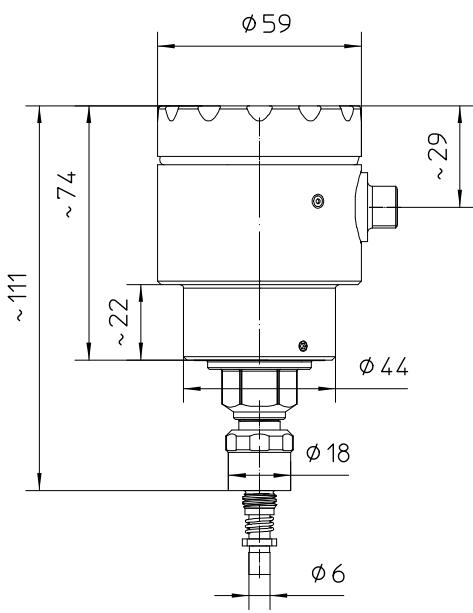


Process connection back

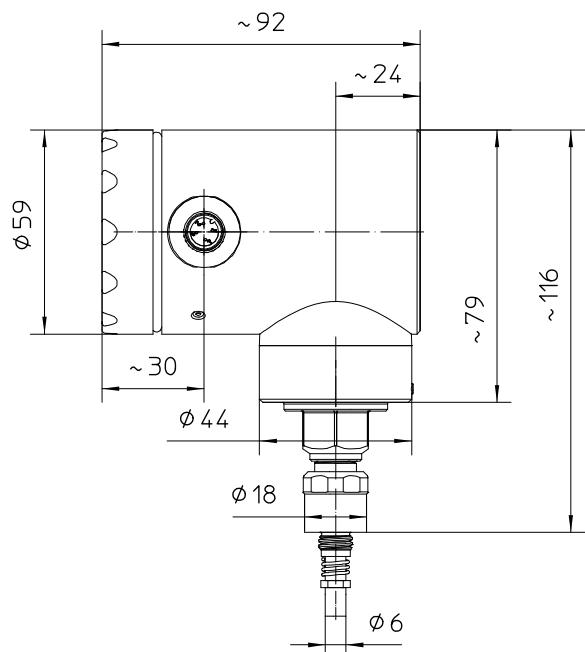

Process connection bottom

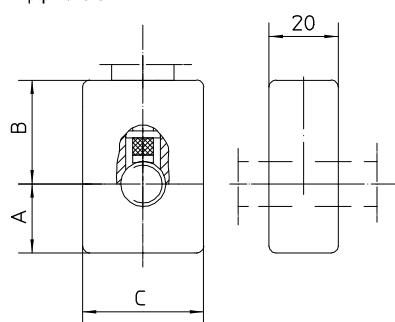

Clamping shoe
for pipe $\geq \varnothing 10 - \sim \varnothing 300$

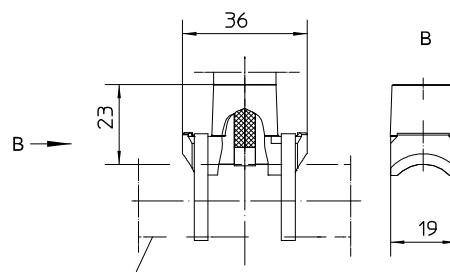

Example: $\varnothing 21\text{mm}$

Order details

Temperature transmitter GV4 Clamp-on for temperature measurement on pipes, Type series GV4610

Order details GV4610						
GV4610	temperature transmitter GV4 Clamp-on					
R70	position process connection	back				
R71		bottom				
F1	parameterisation	standard according to data sheet (see parameterisation table)				
F9		as per customer's specification (pls. specify)				
Q1	accuracy	$\leq 0.25 \text{ K}$				
H21	output signal	4...20 mA, with HART®-protocol				
Y14	material case/window	stainless steel mat.-no.1.4301/1.4305 (304/303)	window Macrolon			
Y12			window non-splintering glass			
Y13			closed, without window			
Y24		stainless steel mat.-no. 1.4404 (316L)	window Macrolon			
Y22			window non-splintering glass			
Y23			closed, without window			
T1	case degree of protection	IP 65 / IP 67				
T4		IP 69K ¹				
M21.1	display	High-resolution graphic display with backlight, intuitive 4-button operation, quick-setup function	default language			
M21.2			English			
M21.3			German			
M1		without display	Chinese			
T20	electrical connection	cable gland M16 x 1.5	polyamide for cable Ø 4.5-10 ²			
T21			brass nickel plated for cable Ø 5-10			
T22			stainless steel mat.-no. 1.4404 (316L) for cable Ø 5-9 ²			
T15		cable gland M20 x 1.5	polyamide for cable Ø 7-13 ²			
T16			brass nickel plated for cable Ø 7-13			
T17			stainless steel mat.-no. 1.4404 (316L) for cable Ø 8-13			
T27		cable gland 1/2" NPT	polyamide for cable Ø 5-12			
T30		circular connector M12x1 (4 pin) ²				
A4 ...	clamping elements	clamping block installation				
B2 ...		clamping shoe installation for pipe diameters $\geq 10 \text{ mm}$, without hose clamps				
B5 ...		clamping shoe installation for pipe diameters $\geq 10 \text{ mm}$, including hose clamps				
	pipe external diameter mm		dimension of the clamping elements			
			50 x 35 x 20	70 x 70 x 20	90 x 85 x 20	23 x 36 x 19
			A4 ...	A4 ...	A4 ...	B2/B5 ...
080			x	-	-	-
093			x	-	-	-
100		10.0	x	-	-	x
102		10.2	x	-	-	x
103		10.3	x	-	-	x
120		12.0	x	-	-	x
127		12.7	x	-	-	x
130		13.0	x	-	-	x
135		13.5	x	-	-	x
137		13.7	x	-	-	x
140		14.0	x	-	-	x
158		15.88	x	-	-	x
160		16.0	x	-	-	x
172		17.2	x	-	-	x

	pipe external diameter mm		dimension of the clamping elements			
			50 x 35 x 20	70 x 70 x 20	90 x 85 x 20	23 x 36 x 19
			A4 ...	A4 ...	A4 ...	B2/B5 ...
996	different Ø 8,0-17,9		x	-	-	-
180	18.0		-	x	-	x
190	19.0		-	x	-	x
195	19.05		-	x	-	x
200	20.0		-	x	-	x
213	21.3		-	x	-	x
220	22.0		-	x	-	x
230	23.0		-	x	-	x
240	24.0		-	x	-	x
250	25.0		-	x	-	x
254	25.4		-	x	-	x
267	26.7		-	x	-	x
269	26.9		-	x	-	x
280	28.0		-	x	-	x
290	29.0		-	x	-	x
300	30.0		-	x	-	x
318	3.8		-	x	-	x
320	32.0		-	x	-	x
334	33.4		-	x	-	x
337	33.7		-	x	-	x
340	34.0		-	x	-	x
350	35.0		-	x	-	x
360	36.0		-	x	-	x
380	38.0		-	x	-	x
998	different Ø 18.0-38.0		-	x	-	-
381	38.1		-	-	x	x
410	41.0		-	-	x	x
424	42.4		-	-	x	x
445	44.5		-	-	x	x
483	48.3		-	-	x	x
508	50.8		-	-	x	x
530	53.0		-	-	x	x
540	54.0		-	-	x	x
570	57.0		-	-	x	x
999	different Ø 38.1 - 57.0		-	-	x	-
991	different Ø 10.0 - 300		-	-	-	x
G23	material clamping elements	PVDF, temperature range media -40...150 °C				
N32	measuring resistor	1 x Pt100 per EN 60751, class A				
U1	ambient temperature	-20...80 °C				
U7		-40...80 °C				

Additional features (to be indicated in case of need, only)

W1204	calibration certificate	per EN 10204-3.1, 3 measuring points
W1201		per EN 10204-3.1, 5 measuring points

Accessories

MC1040	HART®-modem for USB-interface
--------	-------------------------------

Order code (example): GV4610 - R70 - F9 - Q1 - H21 - Y13 - M21.2 - T22 - B5240 - G32 - N32 - U1

¹ only possible with window of Macrolon, gasket made of EPDM/FKM and selected electrical connections (see footnote 2)

² suitable for degree of protection IP 69K

Zone Acticentre – CRT2 – CS 10210
 156/220 Rue des Famards - 59273 FRETIN
 Tél : 03 20 62 06 80 Fax : 03 20 96 95 62
 Mail : contact@dimelco.com

