

Fine dust sensor




Optical sensor for continuous, simultaneous measurement and monitoring of fine dust contents PM10 and PM2.5 indoor and outdoor

SCHEMATIC DESIGN

- A Sensor module for measurement of PM10
 B Sensor module for measurement of PM2.5

- 1 Measuring sensor
- 2 Reference sensor
- 3 Pre-separator
- 4 Residual dust reservoir
- 5 Fan

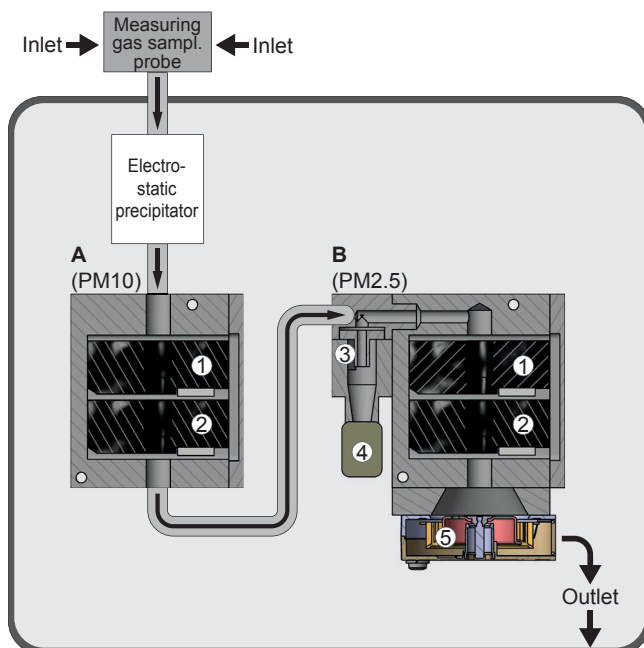


YOUR BENEFITS AT A GLANCE

- simultaneous real-time measurement of PM10/ TSP and PM2.5
- patented electrostatic precipitator for zero point setting
- robust design
- active suction
- long-term stability
- cross linking of several FDS 17
- network-compatible, WLAN
- easy installation without special tool
- low operational costs

PRECONDITIONS ON SITE

- ambient temperature: -20...+50 °C
- relative humidity: 0...95%
- place with representative dust loading
- protection against draught
- no direct solar radiation
- location free of percussion
- power supply
- signal connection (Modbus / mA / WLAN)

INSTALLATION EXAMPLE

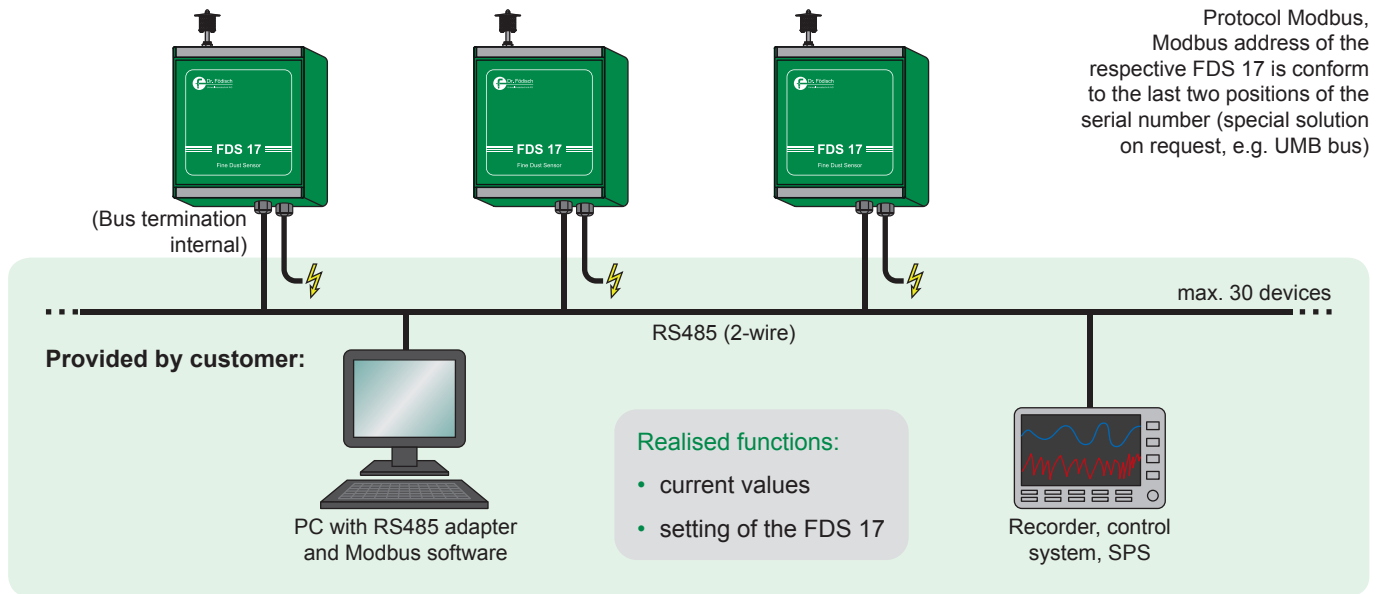

TECHNICAL DATA

Housing:	compact sensor housing made of aluminium; IP33
Dimensions:	200 mm x 313 mm x 121 mm (w x h x d)
Weight:	approx. 4 kg
Ambient temperature:	-20...+50 °C
Relative humidity:	0...95%
Measuring method:	scattered light measurement
Average dust contents:	up to 500 µg/m³ (max. 2000 µg/m³)
Detection limit:	2 µg/m³
Flow:	2 l/min
Sensors:	2x sensor module with two optical sensors for each; separated control and signal evaluation
Zero point setting:	automatic by internal electrostatic precipitator with high voltage module, approx. 10 kV; interval 2-8 h
Fan:	for flow enforcement
Heating:	for conditioning of measuring gas (compliance with the dew-point spread), integrated over temperature protection
Interface:	RS485 (Modbus)
Clip contacts:	max. 0.5 mm; power supply connection: max. 2.5 mm
Power supply:	100-240 V AC, 0.7 A, 50-60 Hz (optional 12-24 V DC, 2.1 A); pre-fuse min. 5 A
Optional:	• 4...20 mA current loop • WLAN module

Special models are possible on request.