



MYALARM3 CLOUD

REMOTE ALARM AND CLOUD BASED MONITORING UNIT



**MULTIFUNCTIONAL DEVICE
EASY USE VIA APP
NO PROGRAMMING REQUIRED**

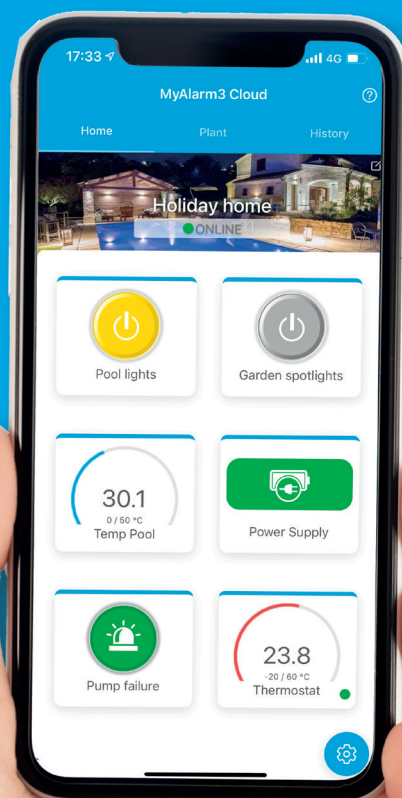



MYALARM3 CLOUD

The cloud at your fingertips

MyAlarm3 Cloud is a system consisting of a GSM/GPRS intelligent control unit and a mobile app for remote control of homes, plants, machinery and unmanned installations. MyAlarm3 Cloud is a compact and reliable all-in one system for residential or industrial applications, in particular for automatic sending of data and alarms from unattended sites. The app offers the main functions useful for monitoring through an immediate consultation and a practical use both from Web browser and from mobile devices, allowing the management of alarms (in case of blackout, variation of digital contacts, exceeding thresholds of thresholds), timed, pulse and on/off commands (lights, motors, gates, pumps, overhead doors, HVAC contacts and crepuscle contacts), for HVAC systems and twilight contacts), GPS (position notifications, virtual fence alarm).


VERSATILITY AND MULTIFUNCTIONALITY



Remote control of unattended sites



Instant configuration via multilanguage iOS/Android App



Automatic sending of commands, data, alarms with push notifications



Extensive widget library to customize the application



Cloud interface



Real-time alerts and alarm management



On-off and time-based controls for gates, motors, pumps, lights, etc.



Opening / Closing temperature threshold contacts (HVAC systems)



Li-On rechargeable battery



GPS module (option)


SYSTEM CONFIGURATION

1. SMART CONTROL UNIT



GSM/GPRS control unit including 4 digital inputs, 2 analogue inputs, 2 digital outputs, LCD display, NTC temperature sensor, input for external NTC sensor, back-up battery, GPS module (optional).

2. iOS / ANDROID MOBILE APP



Free MyAlarm3 Cloud mobile app available from Apple or Android stores. This powerful app in 10 languages allows advanced system configuration in a simple way. It integrates tutorials, manuals and online help.



3. CLOUD SERVICE



In MyAlarm3 Cloud KIT is included a fee for the duration of 12 months from date of first activation. For information and service renewal costs please visit:

www.seneca.it/myalarm3cloud
<https://cloud.seneca.it>

SOME SCENARIOS AND APPLICATIONS



BOILER CONTROL



ANTI FLOODING SYSTEM



IRRIGATION SYSTEM



NETWORK VOLTAGE AND POWER CONSUMPTION CONTROL



HOLIDAY HOUSE REMOTE CONTROL



ACCESS CONTROL



POOL MANAGEMENT



LOCAL AUTOMATION



LIGHT MANAGEMENT



AUTOMATIC GATES OPENING



HVAC SYSTEM MONITORING



ALARM MANAGEMENT




MYALARM3 CLOUD app

The most powerful and easy to use monitoring app




ADVANCED CONFIGURATION

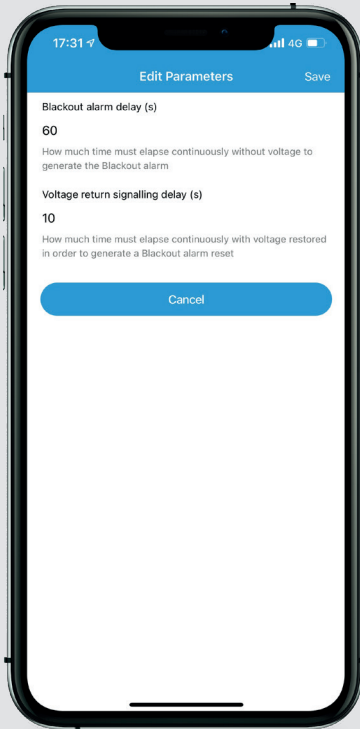


MyAlarm3 Cloud app offers very high levels of parameterization and customization. For example, it allows you to easily set the critical times for the system such as the blackout alarm delay and the delayed power return signal. The app also guides the user through the customization of widgets, image backgrounds and all interface parameters (language, header, widget shape, camera, tab sorting).

ALARMS AND COMMANDS MANAGEMENT

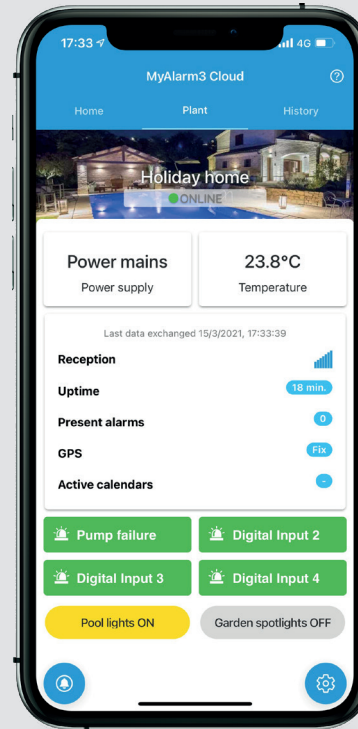


The range of alarms that can be managed in case of blackout, digital contact variations (and related counters), exceeding of analogue thresholds etc. is very wide. In addition to push notifications, these variations can also be matched with actions such as on/off, timed and impulsive commands, for example for opening/closing motors, pumps, gates, overhead doors, lights, twilight contacts (dawn / dusk), temperature thresholds (HVAC systems).

TUTORIAL AND ON-LINE HELP

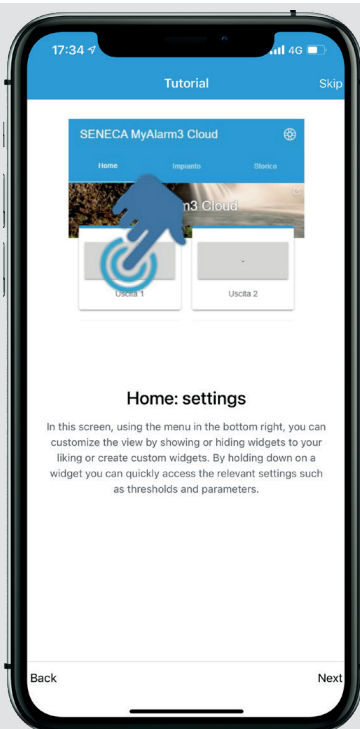


The app provides system setup instructions in graphical format, tutorials and step-by-step guides on managing, creating and customizing widgets, accessing history and system information. It also provides detailed online manuals that save learning time and reduce the risk of user errors.

USER AND INVITATION MANAGEMENT

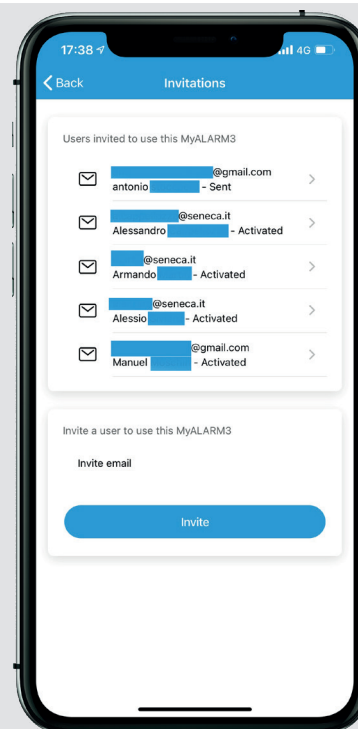


In order to obtain the maximum flexibility of management of the plant, MyAlarm3 Cloud allows you to connect multiple users (unlimited number) to the same plant with a multi-level access system: owner/administrator, editor, user with access through restricted area. The same instance of the app allows access to different installations.

GEOLOCATION

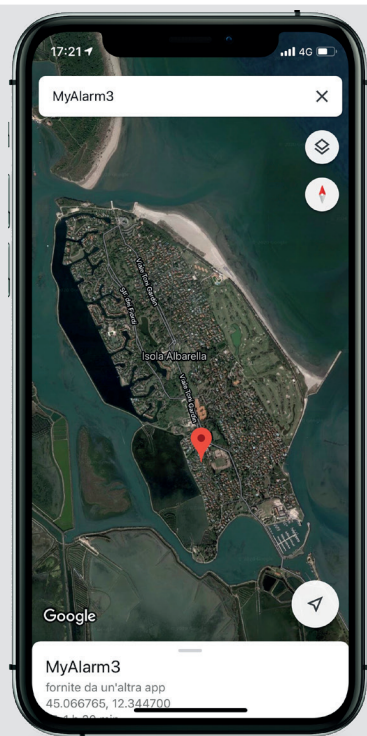


Through optional integrated GPS module, the app makes it possible to receive geolocation notifications and manage alarms, such as exceeding the virtual fence. The control and localization of the system via GPS increases the level of security and expands the range of applications even in mobile conditions.

ALARMS AND EVENTS LOG

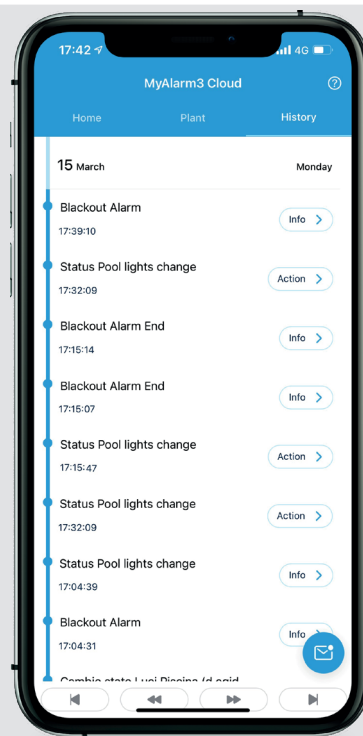


The application has a specific section for the visualization of the log alarms and events (statuses, alerts, errors, warnings) easily filterable and consultable. Reports of offline devices and loading of updates are also provided. The availability of this data provides concrete analysis to monitor plants and obtain a unified view of the operational integrity status.

CALENDAR AND SCHEDULING

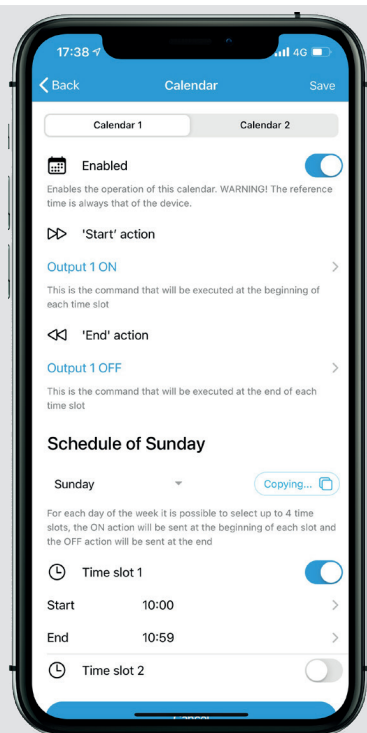

Once the calendar is set and enabled, the app allows you to send commands at the beginning/end of the time slot, such as turning lights on or off at set times, with the availability of 2 weekly calendars programmable up to 4 time slots).

THERMOSTAT FUNCTION

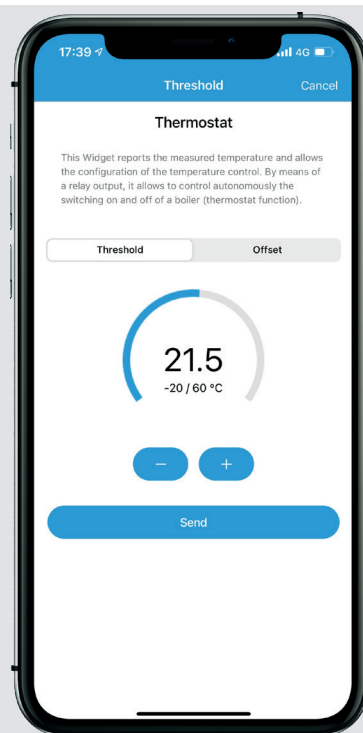

The app allows you to set, modify and send temperature parameters and the alarm associated with exceeding the threshold value. MyALARM3 Cloud behaves in this way as an electronic thermostat to control the room temperature, during heating or air conditioning, with GSM/GPRS module incorporated.

MYALARM3 CLOUD

TECHNICAL FEATURES

| GENERAL DATA | |
|-----------------------|---|
| Power supply | 6-15 Vdc |
| Power consumption | 3.5 W (max) |
| Voltage output | 12 Vdc @50mA(Max Current) |
| Protection degree | IP40 |
| Battery | Rechargeable Li-Ion, 3.7 V -1100 mAh, autonomy up to 5 h |
| Status signals | Power supply - GSM / GPRS - Device status |
| Temperature probe | Internal NTC, optional external probe |
| Connections | Spring terminals, 3.5 mm pitch - Connector for Micro USB SMA connector for GSM antenna - MMCX for GPS (optional) Push-Push slot for SD card and SD HC card / max 32GB |
| CPU | ARM 120 MHz 32 bit |
| Flash memory | 1 MB + 8 MB |
| SD Support | Push-Push for SD card and SD HC card / max 32GB |
| SD supplied | Yes |
| SIM Slot | Push-Push for Mini SIM (15 x 25 mm) |
| SIM supported | Mini SIM card (15x25 mm) |
| Protocols | MQTT, HTTPS |
| Display | LCD 128x32 Dots with visible area 39 mm x 8,6 mm |
| Status LED | On/Off, Network Search, Internet Access |
| GSM | Quad band 850 / 900 / 1800 / 1900 MHz; push-pull SIM port slot, SIM card support |
| GPS | RECEIVER 22 channels - SENSITIVITY -165 dBm FIX TIME 32 s typical - ACCURACY Up to 2.5 m |
| Dimensions | 80 x 105 x 30 mm |
| Weight | 150 g |
| Operating Temperature | 0...+45°C (recommended); -20...+55°C (with battery not charging); |
| Material | ABS polycarbonate |
| Mounting | DIN rail or wall mount |

APP FUNCTIONS AND SETTINGS

| | |
|---------------------|--|
| Management app | MyALARM3 Cloud |
| Widgets available | Analog MAX, Analog MIN, Threshold Counter, Digital Input, GPS Fence, Digital Output, No power supply, Sunrise and sunset, Minimum temperature, Maximum temperature, Boiler (minimum temperature), Air conditioner (aka maximum temperature), Custom widget to send a command |
| Store | Playstore, App Store |
| Interface languages | Italian, English, French, German, Spanish, Dutch, Portuguese, Greek, Russian, Romanian |
| Cloud service | 12 months free from activation |
| Alarm management | Blackout, digital contacts, impulsive contacts, timed contacts, twilight contacts, counters, analog min/max thresholds, motorized utility control, GPS virtual fence |
| Widget management | Units of measure, tags, messages, actions |
| History | Alarm log, events, calendar |
| Menù | Dashboard, calendar, time zone, device selection |
| Options | App parameters, device status, account, online help, privacy, user license, information |
| Home | Utilities control, alarm status, temperature, power grid |
| System management | Power grid, temperature, GSM/GPRS network, GPS, present alarms, uptime, I/O management |

DIGITAL INPUTS

| | |
|---------------|-----------------------------------|
| Channels | 4 |
| Type | REED Contact, PNP, Pulscap, relay |
| Max frequency | 30 Hz |

ANALOG INPUTS

| | |
|------------|---|
| Channels | 2 |
| Type | Current 0..20 mA (max impedance 60 Ω); voltage 0..30 V (max impedance 100 kΩ) |
| Resolution | 16 bit |
| Accuracy | 0,1% f.s. |


DIGITAL OUTPUTS

| | |
|----------|--------------------------|
| Channels | 2 |
| Type | SPST Relay 3 A / 250 Vac |


STANDARD

| | |
|-----------|--|
| Approvals | CE |
| Norms | EN 60950, EN 301511, EN 301 489-7, EN 301489-1 |

A CONCENTRATE OF TECHNOLOGY AND DESIGN

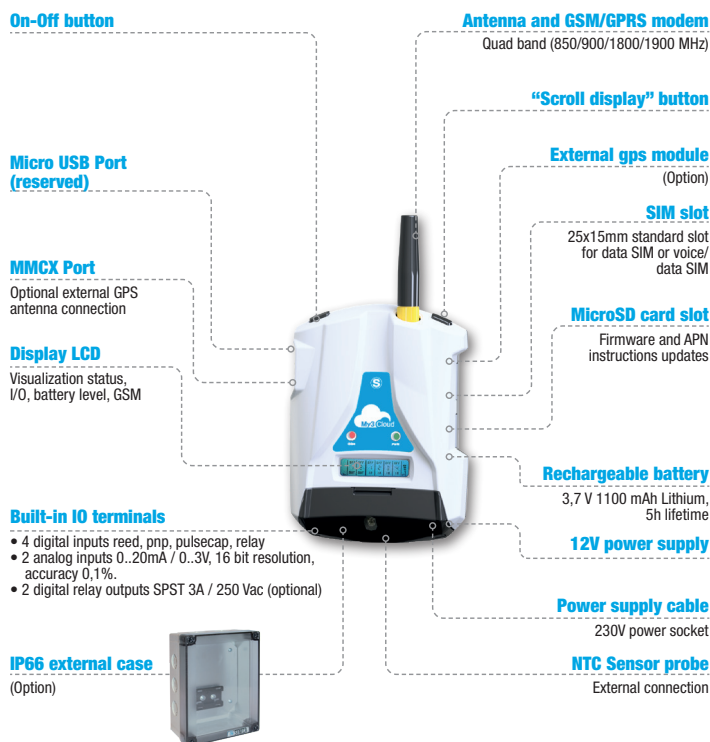

DIMENSION

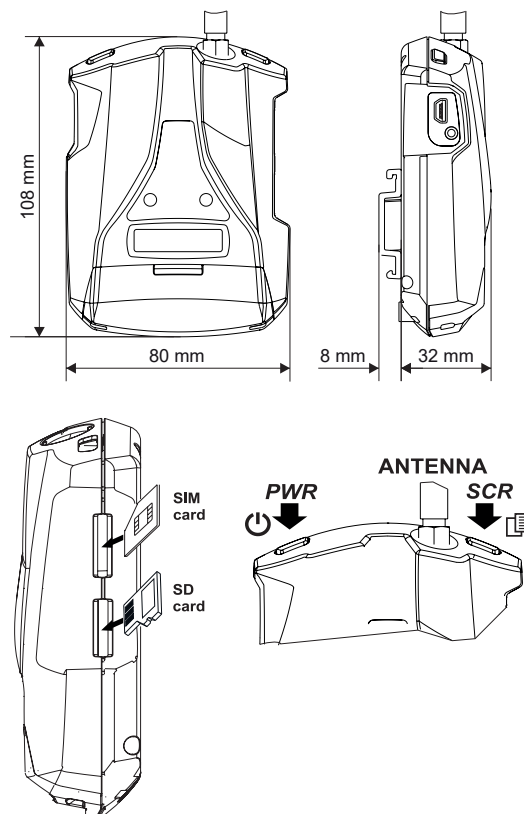

MYALARM3 CLOUD

EQUIPMENT



Included with MyALARM3 Cloud

- 1) MyALARM3 Cloud unit, 2) Quick Start Guide, 3) 12V power supply, 4) GSM/GPRS stylus antenna with SMA connector, 5) Micro SD card, 6) Docking system, 7) V-SIM card.

ORDER CODES

| VERSIONS / OPTION | CODE | DESCRIPTION |
|-------------------|----------|--|
| Base unit | MY3CLOUD | Cloud based GSM/GPRS remote alarm unit |
| SPST relay | -0 | Relay board not present |
| | -R | Relay board present |
| Reserved slot | -0 | Non-modified |
| GPS | -0 | GPS module not present |
| | -G | GPS module present |
| Colors | -G | Grey color |

ACCESSORIES

| CODE | DESCRIPTION |
|------------------|---|
| A-GPS | External GPS antenna with magnetic base and MMCX connection |
| A-GSM | External multi-band antenna with 3 m cable and SMA male connector |
| A.GSM-DIR-5M | Compact directional antenna GSM-DECT-UMTS |
| A-GSM-OMNIDIR | Omnidirectional GSM-UMTS-WIFI Antenna |
| A-GSM-OMNIDIR-10 | Omnidirectional GSM-UMTS-WIFI antenna with 10 m cable length |
| ALIM-MY2 | Replacement power supply |
| BATT-MY2 | Replacement battery |
| CU-A-MICRO-B | USB-A Micro USB-B 5 P plug cable |
| MSD | MicroSD card with SD adapter |
| MY2-KITIP66 | ABS IP66 Kit for quick mounting in the field |
| NTC-150 | External NTC probe 1,5 m |

SERVICES AND SOFTWARES

| CODE | DESCRIPTION |
|--------------------|---|
| MY3C-1Y | Cloud service renewal 12 months |
| MyAlarm3 Cloud app | Management app for iOS 11.0 or later, Android 4.4 or later, and web |

ACCESSORIES

A-GSM



External GSM dual band antenna, cable 3.2 m

A-GSM-DIR- 5M



GSM/UMTS triband directional antenna, 5m cable, SMA

A-GSM-OMNIDIR



GSM-UMTS-WIFI omnidirectional antenna

A-GSM-QUAD-N



High performance GSM quadband antenna

A-GPS



External GPS antenna with magnetic base

FD01



Photodetector for pulse counting

MY2-KITIP66



ABS kit for quick mounting with IP66 protection rating for field applications

NTC-150



External NTC probe 1.5 m



Zone Acticentre – CRT2 – CS 10210
156/220 Rue des Famards - 59273 FRETIN
Tél : 03 20 62 06 80 Fax : 03 20 96 95 62
Mail : contact@dimelco.com